

BRANCH 1


ΠΕΡΙΕΧΟΜΕΝΑ | CONTENTS

Datasheet	1
Manual	3

SKU: **BRNC-XX-XX-XX-XX-XX-XX-XX-XX**

Height	
Color	
Wattage	
CCT	
Voltage/Current	
Acrylic glass	
Support accessories	
Dimmable	

DATASHEET

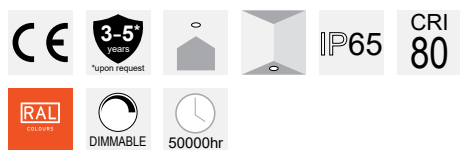

GENERAL INFORMATION

APPLICATION:	Outdoor
MOUNTING SURFACE:	Ground
MOUNTING TYPE:	Surface mounted
MATERIAL:	Brass
IP RATING:	IP65
LED:	Cree / Osram
CRI:	Ra80
LIFETIME:	50000 hours
WARRANTY:	3-5 years (*5 years upon request)
ORIGIN:	Greece
LED TYPE:	2835 SMD

CONFIGURATION OPTIONS

*COLOR:


Black	(BL)	
White	(WH)	
Graphite	(GF)	
RAL colors	(RL)	
Patina	(PT)	
No color	(NO)	

*HEIGHT:

500mm	(H50)
600mm	(H60)
700mm	(H70)
800mm	(H80)
900mm	(H90)
1000mm	(H100)
1200mm	(H120)
1500mm	(H150)

*WATTAGE:

0.5W	(0.5W)
1W	(1W)
2W	(2W)
2.5W	(2.5W)

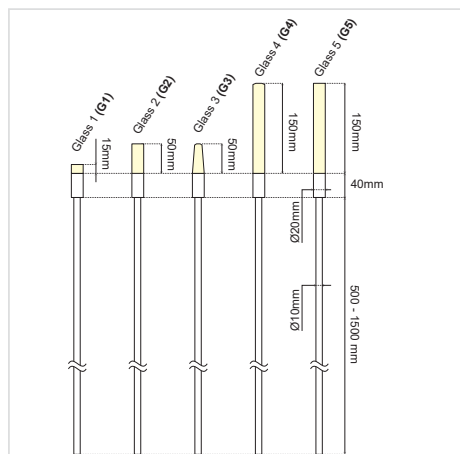

Continued on next page →

BRANCH 1

SKU: **BRNC-XX-XX-XX-XX-XX-XX-XX-XX**

HEIGHT
COLOR
WATTAGE
CCT
VOLTAGE/CURRENT
ACRYLIC GLASS
SUPPORT ACCESSORIES
DIMMABLE

CONFIGURATION OPTIONS (cont.)

*CCT:	OUTPUT:	*VOLTAGE/CURRENT:	*ACRYLIC GLASS:
2200K <i>350/500/700mA only</i> (22K)	70 lm/W	12VDC (V1)	Acrylic glass 1 (15mm) (G1) 
2700K (27K)	100 lm/W	24VDC (V2)	Acrylic glass 2 (50mm) (G2) 
3000K (30K)	110 lm/W	230VAC <i>only with Base D100×H92 (B92)</i> (V3)	Acrylic glass 3 (50mm) (G3) 
4000K (40K)	120 lm/W	12/24V (V4)	Acrylic glass 4 (150mm) (G4) 
5000K (50K)	120 lm/W	350mA <i>0.5/1W only</i> (V5)	Acrylic glass 5 (150mm) (G5) 
6000K (60K)	150 lm/W	500mA <i>2W only</i> (V6)	
Red (R)		700mA <i>2.5 only</i> (V7)	
Green (G)			
Blue (B)			
Amber (A)			

SUPPORT ACCESSORIES:	EXTRAS:	*DIMMABLE:
Pole D10×200mm Brass (PL1) 	Base that accepts 3 Branches (PL) 	Dim PWM (DP)
Pole D10×600mm Brass (PL2) 	Base D100×H92 <i>For 230VAC</i> (B92) 	On/Off (_)
Pole D10×1000mm Brass (PL3) 	Driver Box D100×30mm PVC 230VAC <i>For use with Pole D10 Brass with Base R80 (PL4) / (PL5) / (PL6)</i> (DBPC) 	
Pole D10×200mm Brass with Base R80 (PL4) 		
Pole D10×600mm Brass with Base R80 (PL5) 		
Pole D10×1000mm Brass with Base R80 (PL6) 		

* Υποχρεωτική επιλογή / Mandatory option

ΔΗΜΙΟΥΡΓΙΑ ΚΩΔΙΚΟΥ ΠΡΟΪΟΝΤΟΣ / PRODUCT CODE GENERATOR:

BRNC - Height - Color - Wattage - CCT - Voltage/Current - Acrylic glass - Support accessories - Extras - Dimmable

ΠΑΡΑΔΕΙΓΜΑ / EXAMPLE:

BRNC-H50-BL-1W-27K-V1-PL1-RB-

for BRANCH 1, 50cm, Black, 1W, 2700K, 12VDC, Acrylic glass 1, Pole D10×200mm Brass, Dim PWM, On/Off

BRANCH 1 MANUAL

ΟΔΗΓΙΕΣ ΕΓΚΑΤΑΣΤΑΣΗΣ INSTALLATION INSTRUCTIONS

ΣΗΜΑΝΤΙΚΟ:

Αυτό το εξάρτημα πρέπει να εγκατασταθεί από εξειδικευμένο ηλεκτρολόγο.

Η BarisLight δεν φέρει ευθύνη για τυχόν ζητήματα που προκύπτουν από ακατάλληλη εγκατάσταση που δεν συμμορφώνεται με τα τοπικά πρότυπα ασφαλείας.

Παρακαλούμε δώστε ένα αντίγραφο αυτών των οδηγιών στο άτομο που είναι υπεύθυνο για τη συντήρηση της εγκατάστασης.

IMPORTANT:

This luminaire must be installed by a qualified electrician.




Disclaimer:

BarisLight is not liable for any issues arising from improper installation that does not comply with local safety standards.


Instructions:

Please provide a copy of these instructions to the person responsible for maintaining the installation.

- 1** Προετοιμασία του εδάφους.
Preparation of terrain.
- 2** Βιδώνετε την βάση στο έδαφος.
Apply the base to the ground.
- 3** Περνάτε το καλώδιο ηλεκτρικής παροχής μέσα από τη βάση.
Pass the electric cable through.
- 4** Κάνετε την ηλεκτρική σύνδεση.
Make the electrical connection.
- 5** Τοποθέτηση του φωτιστικού.
Place the luminaire.
- 6** Βιδώνετε το φωτιστικό στην βάση από τις πλαϊνές οπές μέχρι να σταθεροποιηθεί.
Screw the luminaire to the base through the side holes until it is securely stabilized.

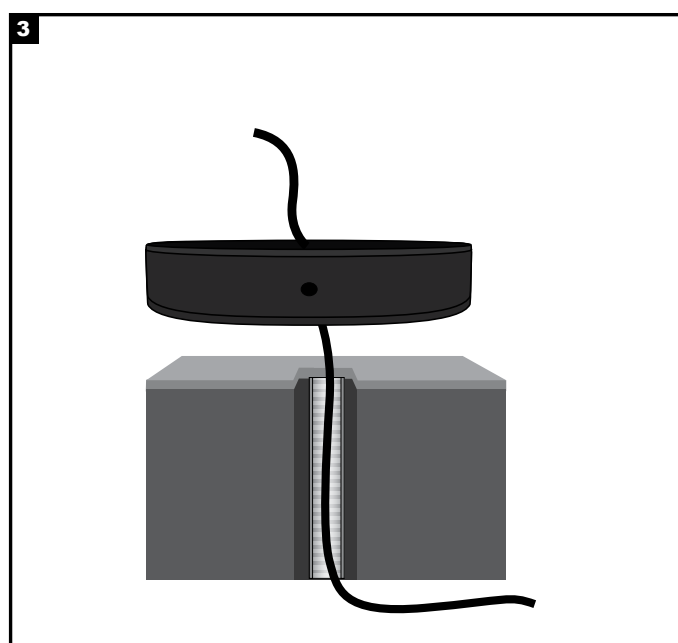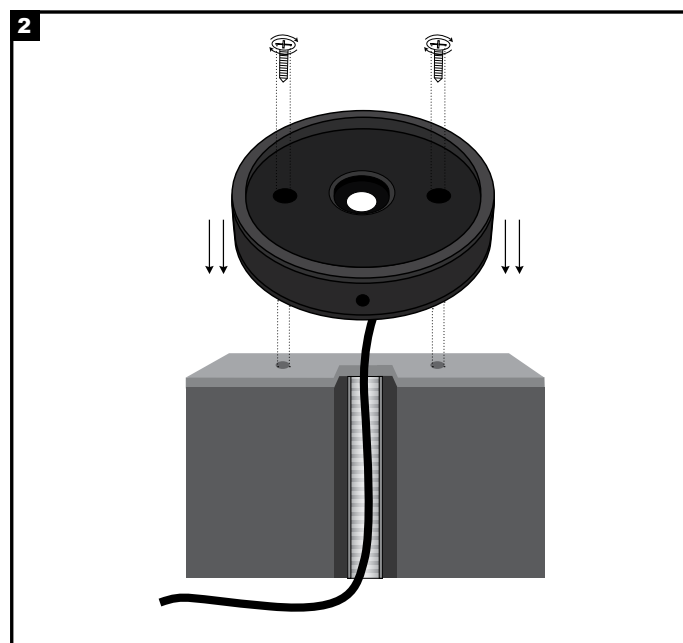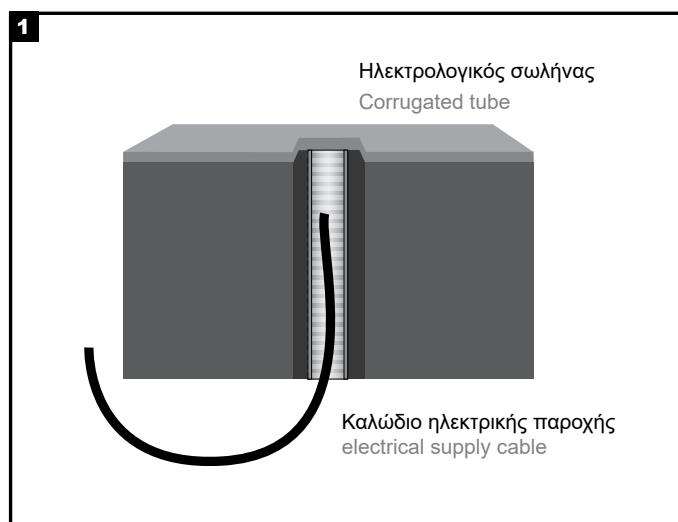

BRANCH 1 MANUAL

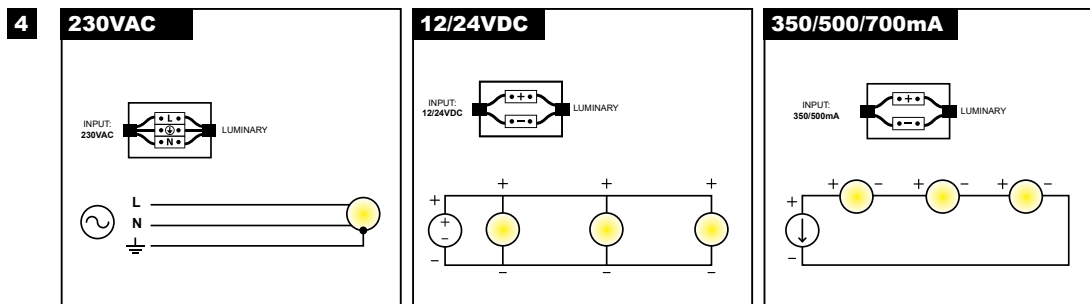

Διαδικασία καλωδίωσης

1. Κλείστε τον κεντρικό διακόπτη ρεύματος.
2. Συνδέστε τα φωτιστικά στη μονάδα παροχής ρεύματος.
3. Συνδέστε τη μονάδα τροφοδοσίας στο ηλεκτρικό δίκτυο.
4. Ενεργοποιήστε τον κεντρικό διακόπτη ρεύματος.

Σημείωση ασφαλείας: Βεβαιωθείτε ότι ο κεντρικός διακόπτης λειτουργίας είναι απενεργοποιημένος κατά τη διάρκεια όλων των διαδικασιών συντήρησης και εγκατάστασης.



Προειδοποίηση: Αποφύγετε τη σύνδεση πάρα πολλών φωτιστικών παράλληλα σε μία μόνο μονάδα τροφοδοσίας για να αποφευχθεί η υπερφόρτωση.

Wiring Procedure

1. Turn off the main power switch.
2. Connect the luminaires to the power supply unit.
3. Connect the power supply unit to the electrical network.
4. Turn on the main power switch.

Safety Notice: Ensure the main power switch is turned off during all maintenance and installation procedures.

Warning: Avoid connecting too many luminaires in parallel to a single power supply unit to prevent overloading.

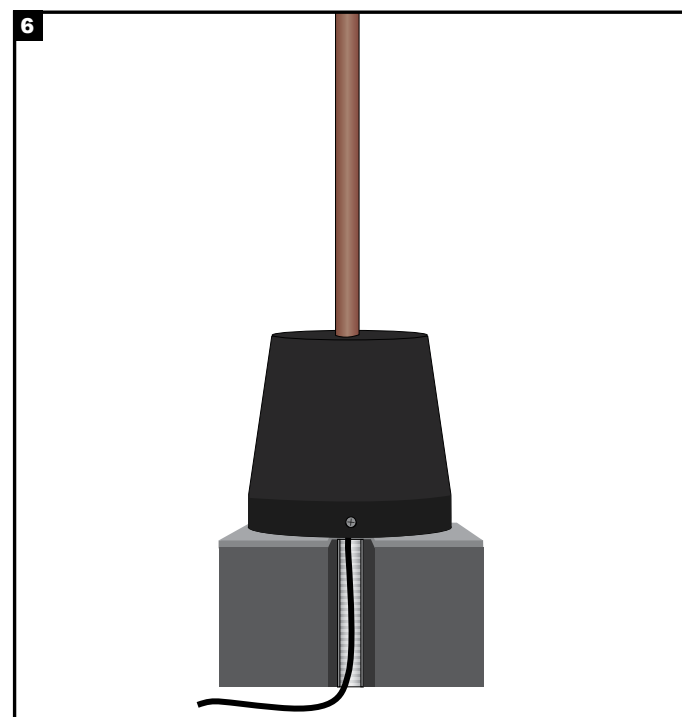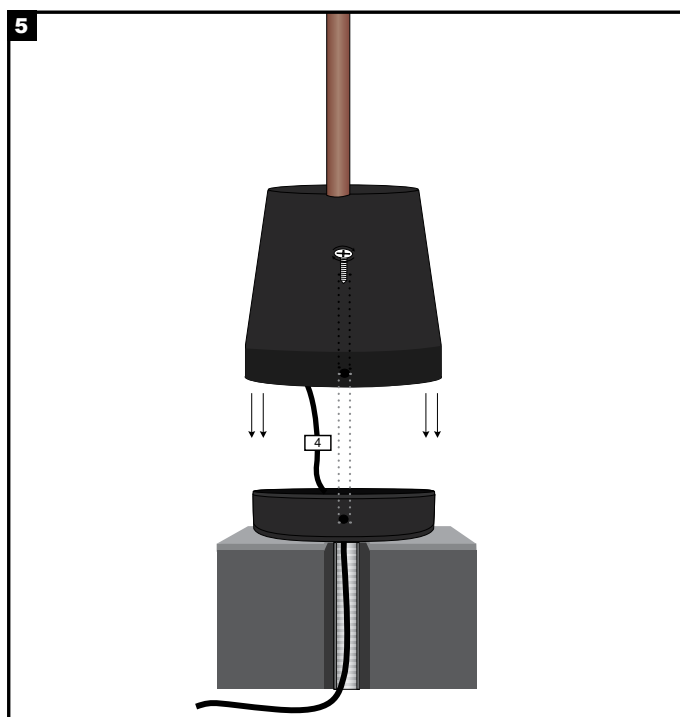

BRANCH 1 MANUAL

Μπορείτε να αναπροσαρμόσετε τους σωλήνες του φωτιστικού ανεξάρτητα και να δημιουργήσετε το design που ταιριάζει καλύτερα στο χώρο σας.

You can re-adjust the luminaires independently and create the design that best suits your space.

