


LED TREE LIGHT 12×6W 720mm 3000K 15D 24VDC IP65

SKU: E9010202-002

DATASHEET

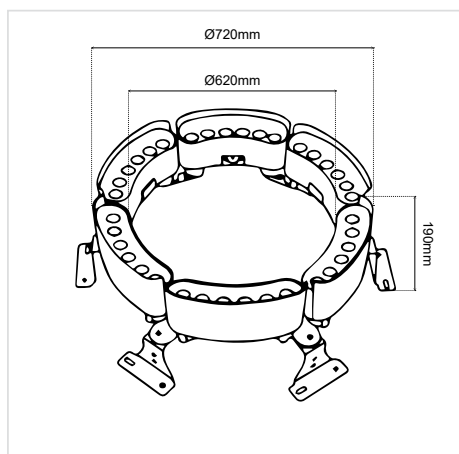

GENERAL INFORMATION

APPLICATION:	Outdoor
MOUNTING SURFACE:	Ground
MOUNTING TYPE:	Surface mounted
MATERIAL: HOUSING:	Aluminium
MATERIAL: BRACKET:	Aluminium
MATERIAL: GLASS:	Tempered glass
DIMENSIONS (Ø×H):	Ø720 × 109 mm
INNER DIAMETER (Ø):	Ø620 mm
IP RATING:	IP65
IK RATING:	IK05
POWER CABLE:	0.5m H05RN-F, 2×1.0mm ²
LIFETIME:	50000 hours
WARRANTY:	3 years
ORIGIN:	PRC

DILLUMINANT

LED TYPE:	High-power LED
LED BRAND:	EPISTAR
INPUT VOLTAGE:	24VDC
POWER:	12×6W
CCT:	3000K
CRI:	Ra>80
BEAM ANGLE:	15D
EFFICIENCY:	65 lm/W

SKU: **PL160** - XX-XX-XX-XX

CCT CRI
BEAM ANGLE
DIMMABLE

CONFIGURATION OPTIONS (cont.)

*WATTAGE:

0.5W	(0.5W)
1W	(1W)
2W	(2W)
2.5W	(2.5W)
3W	(3W)

*DIMMABLE:

Dim	(D)
No dim	()

* Υποχρεωτική επιλογή / Mandatory option

ΔΗΜΙΟΥΡΓΙΑ ΚΩΔΙΚΟΥ ΠΡΟΪΟΝΤΟΣ / PRODUCT CODE GENERATOR:

SUN35 - Color - Wattage - CCT - Power input IP protection - Dimmable

ΠΑΡΑΔΕΙΓΜΑ / EXAMPLE:

SUN35-AN-2W-30K-V2-20-

for SUNSET R35, Anodized, 2W, 3000K, 24VDC, IP20, Non dimmable

SKU: ● 2700K: T2010802-009, ● 3000K: T2010802-010, ● 4000K: T2010802-010, ● 5000K: T2010802-010, ● 6000K: T2010802-010

SUNSET R35 MANUAL

ΟΔΗΓΙΕΣ ΕΓΚΑΤΑΣΤΑΣΗΣ INSTALLATION INSTRUCTIONS

ΣΗΜΑΝΤΙΚΟ:

Αυτό το εξάρτημα πρέπει να εγκατασταθεί από εξειδικευμένο ηλεκτρολόγο.

Η BarisLight δεν φέρει ευθύνη για τυχόν ζητήματα που προκύπτουν από ακατάλληλη εγκατάσταση που δεν συμμορφώνεται με τα τοπικά πρότυπα ασφαλείας.

Παρακαλούμε δώστε ένα αντίγραφο αυτών των οδηγιών στο άτομο που είναι υπεύθυνο για τη συντήρηση της εγκατάστασης.

IMPORTANT:

This luminaire must be installed by a qualified electrician.


Disclaimer:

BarisLight is not liable for any issues arising from improper installation that does not comply with local safety standards.

Instructions:

Please provide a copy of these instructions to the person responsible for maintaining the installation.

Σύνδεση με την ηλεκτρική παροχή Connection to the electrical supply

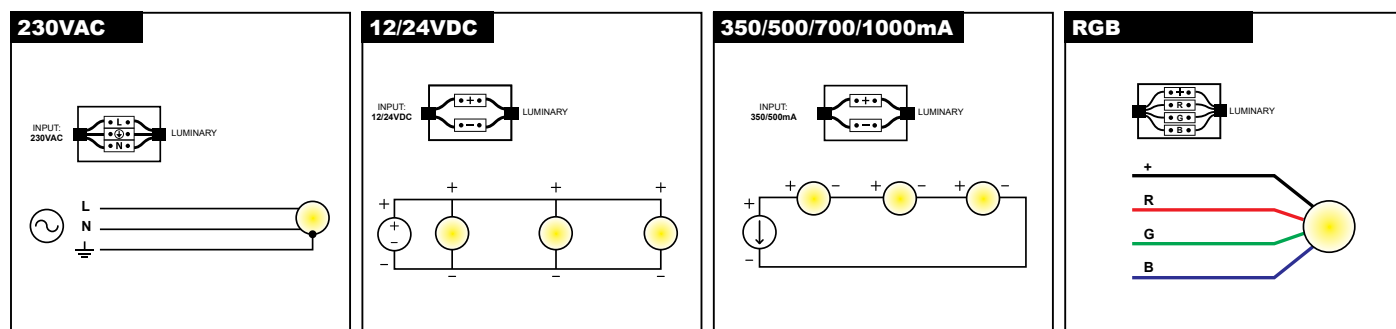

Διαδικασία καλωδίωσης

1. Κλείστε τον κεντρικό διακόπτη ρεύματος.
2. Συνδέστε τα φωτιστικά στη μονάδα παροχής ρεύματος.
3. Συνδέστε τη μονάδα τροφοδοσίας στο ηλεκτρικό δίκτυο.
4. Ενεργοποιήστε τον κεντρικό διακόπτη ρεύματος.

Σημείωση ασφαλείας: Βεβαιωθείτε ότι ο κεντρικός διακόπτης λειτουργίας είναι απενεργοποιημένος κατά τη διάρκεια όλων των διαδικασιών συντήρησης και εγκατάστασης.

Προειδοποίηση: Αποφύγετε τη σύνδεση πάρα πολλών φωτιστικών παράλληλα σε μία μόνο μονάδα τροφοδοσίας για να αποφευχθεί η υπερφόρτωση.

Wiring Procedure

1. Turn off the main power switch.
2. Connect the luminaires to the power supply unit.
3. Connect the power supply unit to the electrical network.
4. Turn on the main power switch.

Safety Notice: Ensure the main power switch is turned off during all maintenance and installation procedures.

Warning: Avoid connecting too many luminaires in parallel to a single power supply unit to prevent overloading.

SUNSET R35 MANUAL

Τοποθέτηση με χωνευτό κουτί εγκατάστασης Installation with recessed installation sleeve

