

STARRY SKY 1L


ΠΕΡΙΕΧΟΜΕΝΑ / CONTENTS

DATASHEET	1
MANUAL	2

SKU: **STAR12- XX-XX-XX-XX**

Color	
CCT	
Voltage	
Dimmable	

DATASHEET

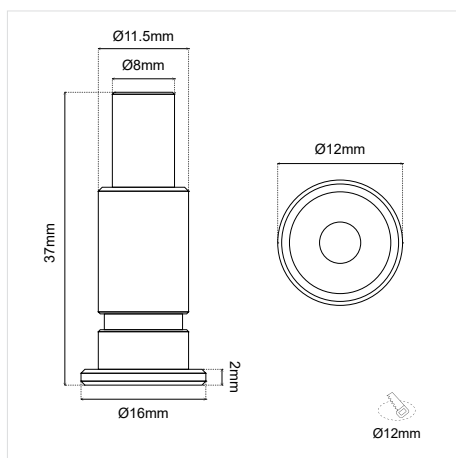

GENERAL INFORMATION

APPLICATION:	Indoor
MOUNTING SURFACE:	Ceiling / Wall
MOUNTING TYPE:	Recessed
MATERIAL:	Inox
DIMENSIONS (Ø×L):	16 × 37 mm
WEIGHT:	25g
IP PROTECTION:	IP20
CABLE INCLUDED:	Yes
DRIVER INCLUDED:	No
LED:	Nichia
WATTAGE:	0.1W
BEAM ANGLE:	25D
CRI:	Ra80
LIFE TIME:	50000 hours
WARRANTY:	3–5 years (*5 years upon request)
ORIGIN:	Greece

CONFIGURATION OPTIONS

*COLOR:	*CCT:	OUTPUT:
Black (BL)	2700K (27K)	100 lm/W
White (WH)	4000K (40K)	120 lm/W
RAL colors (RL)	5000K (50K)	120 lm/W
Patina (PT)	(R) / (G) / (B) / (A)	
No color (NO)	RGB (C1)	

*VOLTAGE:	*DIMMABLE
12VDC (V1)	Dim (D)
24VDC (V2)	No Dim (L)

* Υποχρεωτική επιλογή / Mandatory option

ΔΗΜΙΟΥΡΓΙΑ ΚΩΔΙΚΟΥ ΠΡΟΪΟΝΤΟΣ / PRODUCT CODE GENERATOR:

STAR12- color - CCT - voltage - dimmable

ΠΑΡΑΔΕΙΓΜΑ / EXAMPLE:

STAR12 - BL-27K-V1-D

for STARRY SKY 1L, black, 2700K, 12VDC, dimmable

STARRY SKY 1L MANUAL

ΟΔΗΓΙΕΣ ΕΓΚΑΤΑΣΤΑΣΗΣ INSTALLATION INSTRUCTIONS


ΣΗΜΑΝΤΙΚΟ:

Αυτό το εξάρτημα πρέπει να εγκατασταθεί από εξειδικευμένο ηλεκτρολόγο.

Η BarisLight δεν φέρει ευθύνη για τυχόν ζητήματα που προκύπτουν από ακατάλληλη εγκατάσταση που δεν συμμορφώνεται με τα τοπικά πρότυπα ασφαλείας.


Παρακαλούμε δώστε ένα αντίγραφο αυτών των οδηγιών στο άτομο που είναι υπεύθυνο για τη συντήρηση της εγκατάστασης.

ΣΥΝΔΕΣΗ ΜΕ ΤΗΝ ΗΛΕΚΤΡΙΚΗ ΠΑΡΟΧΗ CONNECTION TO THE ELECTRICAL SUPPLY



Διαδικασία καλωδίωσης

1. Κλείστε τον κεντρικό διακόπτη ρεύματος.
2. Συνδέστε τα φωτιστικά στη μονάδα παροχής ρεύματος.
3. Συνδέστε τη μονάδα τροφοδοσίας στο ηλεκτρικό δίκτυο.
4. Ενεργοποιήστε τον κεντρικό διακόπτη ρεύματος.



Σημείωση ασφαλείας: Βεβαιωθείτε ότι ο κεντρικός διακόπτης λειτουργίας είναι απενεργοποιημένος κατά τη διάρκεια όλων των διαδικασιών συντήρησης και εγκατάστασης.

Προειδοποίηση: Αποφύγετε τη σύνδεση πάρα πολλών φωτιστικών παράλληλα σε μία μόνο μονάδα τροφοδοσίας για να αποφευχθεί η υπερφόρτωση.

Η σύνδεση πρέπει να είναι στεγανή.

Wiring Procedure

1. Turn off the main power switch.
2. Connect the luminaires to the power supply unit.
3. Connect the power supply unit to the electrical network.
4. Turn on the main power switch.

Safety Notice: Ensure the main power switch is turned off during all maintenance and installation procedures.

Warning: Avoid connecting too many luminaires in parallel to a single power supply unit to prevent overloading.

The connection must be sealed.

