

WALL JAZ ROUND BASE

ΠΕΡΙΕΧΟΜΕΝΑ | CONTENTS

Datasheet	1
Manual	4

SKU: **WJ30BRD-XX-XX-XX-XX-XX**

Length	XX
Color	XX
Illuminant	XX
Base options	XX
IP Protection	XX
Dimmable	XX


DATASHEET



GENERAL INFORMATION

APPLICATION:	Indoor
MOUNTING SURFACE:	Wall
MOUNTING TYPE:	Surface mounted
MATERIAL:	Aluminium / Polycarbonate
PROFILE DIMENSIONS:	Ø30 × L mm
BASE DIMENSIONS:	Ø70 × L55 mm / Ø100 × L50 mm
LIFETIME:	50000 hours
WARRANTY:	3–5 years (*5 years upon request)
ORIGIN:	Greece

CONFIGURATION OPTIONS

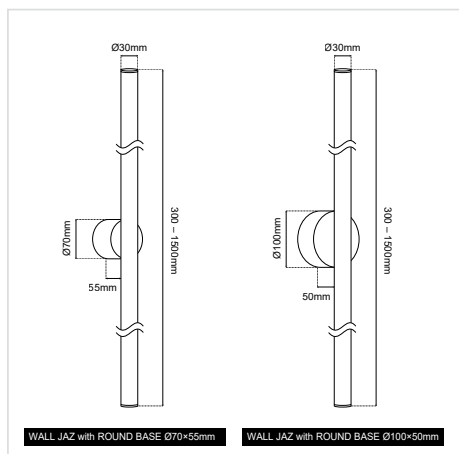

*LENGTH:

30cm	(30W)
40cm	(40W)
50cm	(50W)
60cm	(60W)
70cm	(70W)
80cm	(80W)
90cm	(90W)
100cm	(100W)
110cm	(110W)
120cm	(120W)
130cm	(130W)
140cm	(140W)
150cm	(150W)

*COLOR:

Anodised	(AN)	
Black	(BL)	
White	(WH)	
Graphite	(GF)	
RAL colors	(RL)	
Patina	(PT)	
No color	(NO)	

Continued on next page →

WALL JAZ ROUND BASE

SKU: **WJ30BRD-XX-XX-XX-XX-XX-XX**

LENGTH
COLOR
ILLUMINANT
BASE
IP PROTECTION
DIMMABLE

CONFIGURATION OPTIONS (cont.)

*ILLUMINANT: _____

WATTAGE:	VOLTAGE:	CCT:	CRI:	OUTPUT:	*CODE:
6W/m	24V	2700K	Ra>90	486 lm/m	(679)
		3000K		540 lm/m	(639)
		4000K		600 lm/m	(649)
		6000K		630 lm/m	(669)
9.6W/m	24V	3000K	Ra>80	540 lm/m	(9.638)
		4000K		600 lm/m	(9.648)
		6000K		630 lm/m	(9.668)
	12V	Red		865~1000 lm	(9.612R)
		Green		865~1000 lm	(9.612G)
		Amber		865~1000 lm	(9.612A)
	24V	Red		865~1000 lm	(9.612R)
		Green		865~1000 lm	(9.612G)
		Amber		865~1000 lm	(9.612A)
12W/m	24V	2700K	Ra>90	960 lm/m	(1279)
		3000K		1080 lm/m	(1239)
		4000K		1200 lm/m	(1249)
		6000K		1320 lm/m	(1269)
		RGB+3000K		1020 lm/m	(12R39)
		RGB+4000K		1020 lm/m	(12R69)
	230V	3000K	Ra>80	1000 lm/m	(123V38)
		4000K		1000 lm/m	(123V48)
		6500K		1000 lm/m	(123V658)
16W/m	24V	RGB			(16RGB)
18W/m (IP20 only)	24V	3000K	Ra>80	2880 lm/m	(1838)
		4000K		3006 lm/m	(1848)
		6500K		3006 lm/m	(18658)
		3000K	Ra>90	2880 lm/m	(1839)
		4000K		3006 lm/m	(1849)
		6500K		3006 lm/m	(18659)
20W/m	24V	2700K	Ra>90	1560 lm/m	(2079)
		3000K		1700 lm/m	(2039)
		4000K		1840 lm/m	(2049)
		6000K		2020 lm/m	(2069)

Continued on next page →

WALL JAZ ROUND BASE

SKU: **WJ30BRD-XX-XX-XX-XX-XX-XX**

LENGTH
COLOR
ILLUMINANT
BASE OPTIONS
IP PROTECTION
DIMMABLE

CONFIGURATION OPTIONS (cont.)

*BASE OPTIONS:

Base Ø70×55mm		(BF75)
Base Ø100×50mm		(BF105)

*IP PROTECTION:

IP20	(20)
IP54 (Not for 8W/m)	(54)

*DIMMABLE:

Dimmable	(D)
On/Off	(L)

Please get the corresponding
Controllers / Dimmers from our
wide range of products.

* Υποχρεωτική επιλογή / Mandatory option

ΔΗΜΙΟΥΡΓΙΑ ΚΩΔΙΚΟΥ ΠΡΟΪΟΝΤΟΣ / PRODUCT CODE GENERATOR:

WJ30BRD - Length - Color - CCT - Illuminant - Base Options - IP protection - Dimmable

ΠΑΡΑΔΕΙΓΜΑ / EXAMPLE:

WJ30BRD-90-BL-1239-BF75-20-

for WALL JAZ Round Base, 90cm, Black, 12W/m, 24VDC, 3000K, Ra90, Base Ø70×55mm, IP20, On/Off

WALL JAZ ROUND BASE MANUAL

ΟΔΗΓΙΕΣ ΕΓΚΑΤΑΣΤΑΣΗΣ INSTALLATION INSTRUCTIONS

ΣΗΜΑΝΤΙΚΟ:

Αυτό το εξάρτημα πρέπει να εγκατασταθεί από εξειδικευμένο ηλεκτρολόγο.

Η BarisLight δεν φέρει ευθύνη για τυχόν ζητήματα που προκύπτουν από ακατάλληλη εγκατάσταση που δεν συμμορφώνεται με τα τοπικά πρότυπα ασφαλείας.

Παρακαλούμε δώστε ένα αντίγραφο αυτών των οδηγιών στο άτομο που είναι υπεύθυνο για τη συντήρηση της εγκατάστασης.

IMPORTANT:

This luminaire must be installed by a qualified electrician.


Disclaimer:

BarisLight is not liable for any issues arising from improper installation that does not comply with local safety standards.

Instructions:

Please provide a copy of these instructions to the person responsible for maintaining the installation.

Εφαρμογή στην επιφάνεια Application on the surface

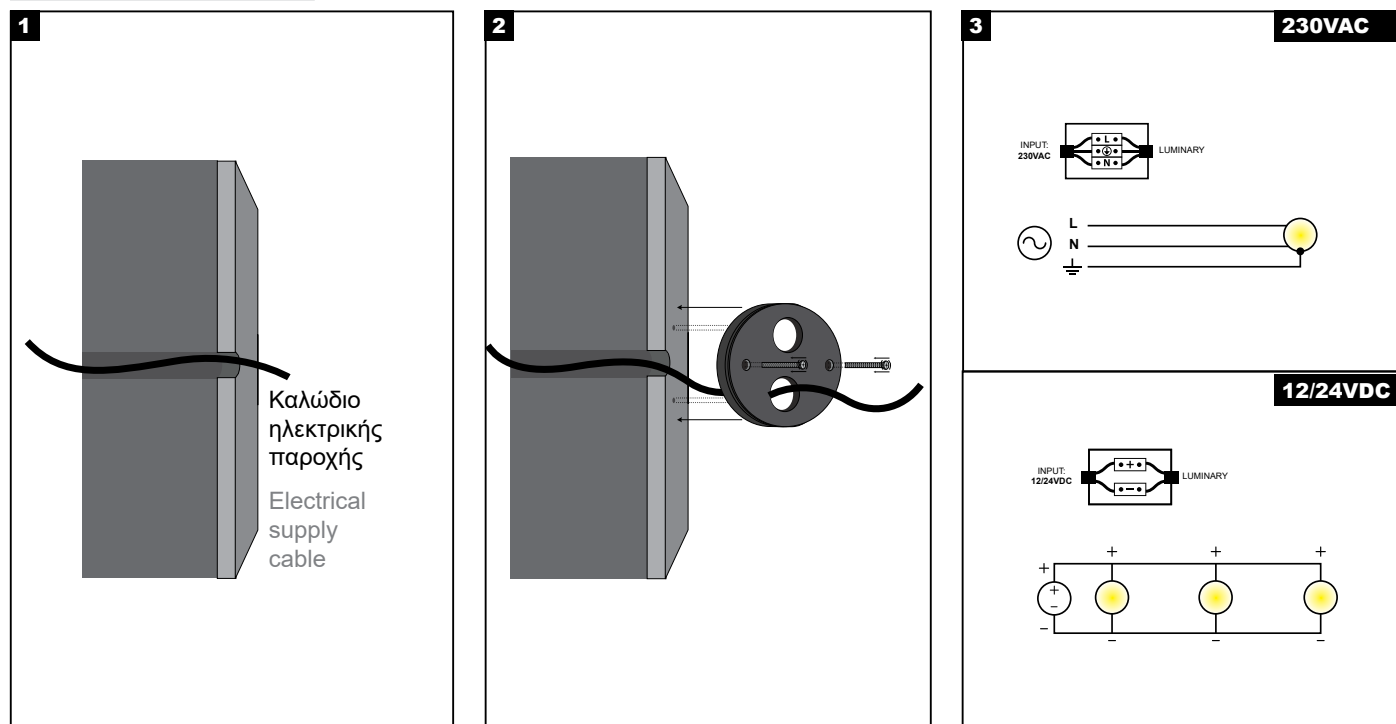

Διαδικασία καλωδίωσης

1. Κλείστε τον κεντρικό διακόπτη ρεύματος.
2. Συνδέστε τα φωτιστικά στη μονάδα παροχής ρεύματος.
3. Συνδέστε τη μονάδα τροφοδοσίας στο ηλεκτρικό δίκτυο.
4. Ενεργοποιήστε τον κεντρικό διακόπτη ρεύματος.

Σημείωση ασφαλείας: Βεβαιωθείτε ότι ο κεντρικός διακόπτης λειτουργίας είναι απενεργοποιημένος κατά τη διάρκεια όλων των διαδικασιών συντήρησης και εγκατάστασης.

Προειδοποίηση: Αποφύγετε τη σύνδεση πάρα πολλών φωτιστικών παράλληλα σε μία μόνο μονάδα τροφοδοσίας για να αποφευχθεί η υπερφόρτωση.

Wiring Procedure

1. Turn off the main power switch.
2. Connect the luminaires to the power supply unit.
3. Connect the power supply unit to the electrical network.
4. Turn on the main power switch.

Safety Notice: Ensure the main power switch is turned off during all maintenance and installation procedures.

Warning: Avoid connecting too many luminaires in parallel to a single power supply unit to prevent overloading.

WALL JAZ ROUND BASE MANUAL

