

PV2 R40 BASE


ΠΕΡΙΕΧΟΜΕΝΑ / CONTENTS

Datasheet	1
Manual	3

SKU: **PV2B40-** XX-XX-XX-XX-XX-XX-XX-XX-XX-XX

	Material
	Color
	Wattage
	CCT
	CRI (for RGB, skip CRI code)
	Voltage / Current
	Beam angle
	IP protection
	Dimmable
	Extras
	Mounting accessories

PV2 R40 BASE (PV2B40-) / Datasheet

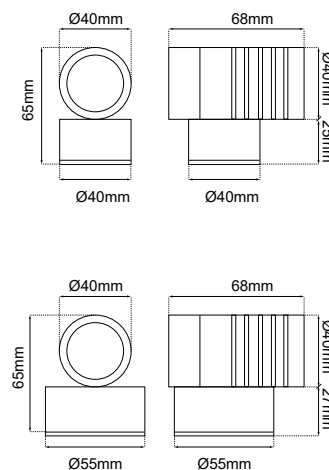

GENERAL INFORMATION

APPLICATION	Outdoor / Surface mounted
DIRECTION OF MOUNTING	Ceiling / Wall / Ground
VISIBLE DIMENSIONS (Ø×L)	Ø40 × 68 mm
INCL. CABLE	Yes
LED TYPE	XTE/XRE/XPE/NICHIA/GU10
LIFE TIME	50000 hours
WARRANTY	3–5 years (*5 years upon request)
ORIGIN	Greece

PV2 R40 BASE / Datasheet

SKU: **PV2B40-XX-XX-XX-XX-XX-XX-XX-XX-XX-XX**

MATERIAL
COLOR
WATTAGE
CCT
CRI (skip for RGB)
VOLTAGE / CURRENT
BEAM ANGLE
IP PROTECTION
DIMMABLE
EXTRAS
MOUNTING ACCESSORIES

Material	Color	Wattage	CCT	CRI	Voltage / Current
Aluminium (01)	Anodised (AN)	0.5W (05W)	2700K (27K)	Ra80 (80)	12VDC (V1)
Inox (02)	Black (BL)	1W (1W)	3000K (30K)	Ra90 (90)	24VDC (V2)
Brass (03)	White (WH)	2W (2W)	4000K (40K)		230VAC (V3)
	RAL colors (RL)	2.5W (25W)	5000K (50K)		12/24V (V4)
	Patina (PT)	3W (3W)	6000K (60K)		350mA (V5)
			(R) / (G) / (B) / (A)		500mA (V6)
			RGB (C1)		

Beam Angle	IP	Dimmable	Extras	Extras
Diffuse (DF)	IP65 (65)	Yes (D)	Shadow (SH)	Base R40x25mm (MB1)
8D (8D)	IP66 (66)	No ()	Honeycomb (HC)	Base R55x27mm (MB2)
15D (15D)	IP67 (67)		None ()	
20D (20D)				
35D (35D)				
40D (40D)				
60D (60D)				
80D (80D)				

Δημιουργία Κωδικού προϊόντος / Product Code generator

PV2B40- material - color - wattage - CCT - CRI - voltage - beam angle - IP - dimmable - extras - extension - mounting accessories

EXAMPLE:


PV2B40 - 01-BL-3W-27K-90-V1-15D-65-D-SH-HC -H30-MB1

for PV2 R40 BASE, aluminium, black, 3W, 2700K, Ra90, 12VDC, 15°, IP65, dimmable, shadow and honeycomb - branch of height 300mm, base R40x27)


PV2 R40 BASE / Manual

ΟΔΗΓΙΕΣ ΕΓΚΑΤΑΣΤΑΣΗΣ INSTALLATION INSTRUCTIONS


1.

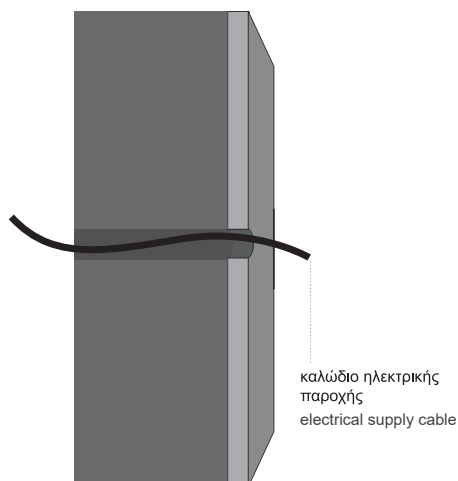

2.

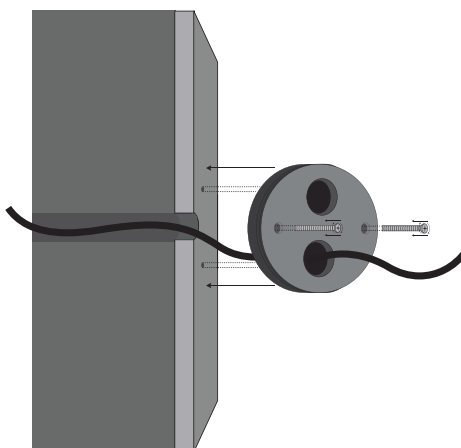

3.




Συνδέστε το καλώδιο του φωτιστικού με την ηλεκτρική παροχή.

Connect the cable of the luminaire with the electrical supply.

4.

Εφαρμογή στον τοίχο
Application on the wall

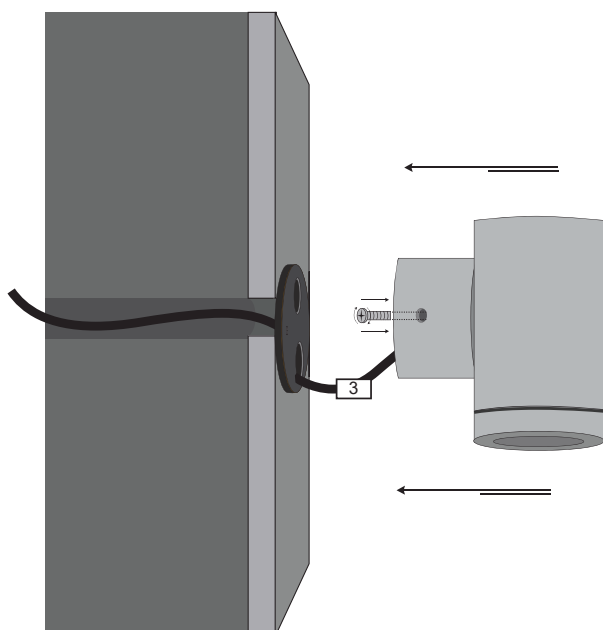

5.

Εφαρμόστε το φωτιστικό στην τοποθετημένη βάση και βιδώστε το πάνω της με δεξιόστροφη περιστροφή μέχρι να σταθεροποιηθεί.
Apply the lamp to the mounted base and tighten it with a clockwise rotation until it is firmly stabilized on the base.

