


# STEP 1 BEAM R60




## ΠΕΡΙΕΧΟΜΕΝΑ / CONTENTS

datasheet	1
manual	2

## ΚΩΔΙΚΟΣ / CODE

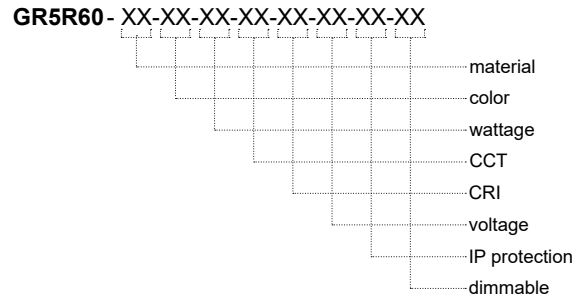

## STEP 1 BEAM R60 (GR5R60) / Datasheet

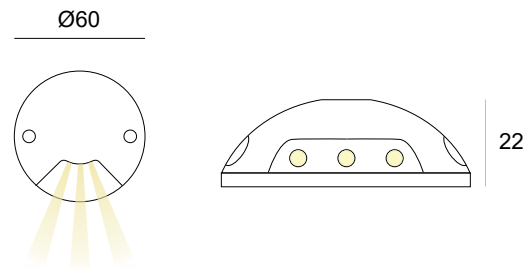

### General information

Application	Indoor / Outdoor
Direction of mounting	Ground
LED	Cree / Osram
Life time	50000 hrs
Warranty	3-5 years (*5 years upon request)
Origin	Greece
Visible dimensions (Ø×L)	Ø60 × 22 mm

Material	Color	Wattage	CCT	CRI	Voltage	IP	Dimmable
Aluminium (01)	Anodised (AN)	0.5W (05W)	2700K (27K)	Ra80 (80)	12VDC (V1)	IP20 (20)	Yes (D)
Inox (02)	Black (BL)	1W (1W)	3000K (30K)	Ra90 (90)	24VDC (V2)	IP54 (54)	No (L)
Brass (03)	White (WH)	2W (2W)	4000K (40K)		230VAC (V3)	IP65 (65)	
CU (06)	RAL colors (RL)	2.5W (25W)	5000K (50K)		12/24V (V4)	IP67 (65)	
		3W (3W)	6000K (60K)		350mA (V5)		
			(R)/(G)/(B)/(A)		500mA (V6)		
			RGB (C1)				

Δημιουργία Κωδικού προϊόντος / Product Code generator


**GR5R60 - material - color - wattage - CCT - CRI - voltage - IP - dimmable**

(ex. GR5R60-01-AN-1W-27K-80-V1-54-D for Step 1 Beam R60 Aluminium Anodised 1W 2700K Ra80 12VDC IP54 Dimmable)


## STEP 1 BEAM R60 / Manual

1. ΠΡΟΕΤΟΙΜΑΣΙΑ ΤΟΥ ΕΔΑΦΟΥΣ / PREPARATION OF TERRAIN
2. ΚΑΝΕΤΕ ΤΗΝ ΗΛΕΚΤΡΙΚΗ ΣΥΝΔΕΣΗ / MAKE THE ELECTRICAL CONNECTION
3. ΤΟΠΟΘΕΤΗΣΗ ΤΟΥ ΦΩΤΙΣΤΙΚΟΥ / PLACE THE LUMINAIRE (επιδαπέδια/ground)

1.

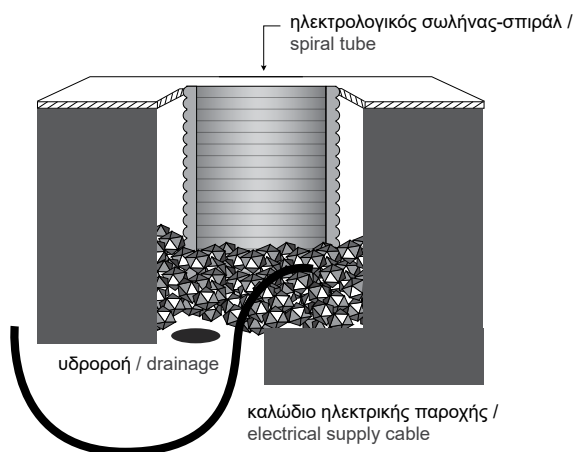


2.



Συνδέστε το καλώδιο του φωτιστικού με την ηλεκτρική παροχή. Η σύνδεση πρέπει να είναι στεγανή. / Connect the cable of the luminaire with the electrical supply. The connection must be sealed.

3. Εφαρμογή στο έδαφος με βίδωμα / Application on ground using screws

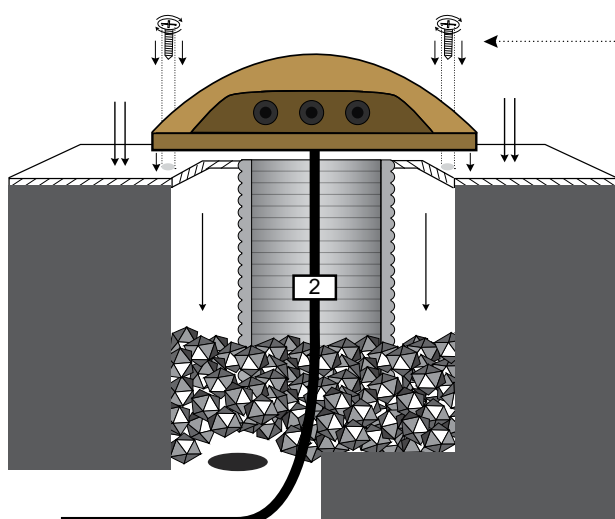

βίδες x2 INOX / x2 INOX screws (συμπεριλαμβάνονται / included)

Εφαρμόστε το φωτιστικό στην επιφάνεια και βιδώστε το μέχρι να σταθεροποιηθεί στο έδαφος. / Apply the lamp to the surface and tighten the screws in until it is firmly stabilized on the ground.