

WALL 12 O'CLOCK

ΠΕΡΙΕΧΟΜΕΝΑ / CONTENTS

DATASHEET	1
MANUAL	2

SKU: **12CLC** - XX-XX-XX-XX-XX-XX-XX-XX-XX

	Height
	Rosette installation
	Light direction
	Color
	CCT
	CRI
	Voltage
	IP
	Dimmable
	CRI

DATASHEET



GENERAL INFORMATION

APPLICATION:	Indoor
MOUNTING SURFACE:	Wall
MOUNTING TYPE:	Surface
MATERIAL:	Aluminium
LIFE TIME:	50000 hours
WARRANTY:	3-5 years (*5 years upon request)
ORIGIN:	Greece



CONFIGURATION OPTIONS

*HEIGHT:

(85cm)
(120cm)
(150cm)
(180cm)

*ROSETTE INSTALLATION:

One rosette (up to 150cm height)		Two rosettes (required from 150cm)	
Base	(R1)	Base × 2	(R1+1)
1/4 Profile	(R2)	1/8 Profile × 2	(R2+2)
Middle	(R3)	1/4 Profile × 2	(R+4)
Other (upon request)	(RKZ)	3/8 Profile × 2	(R+3)
		Other (upon request)	(2RBKZ)

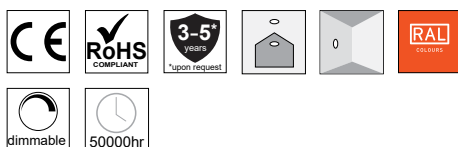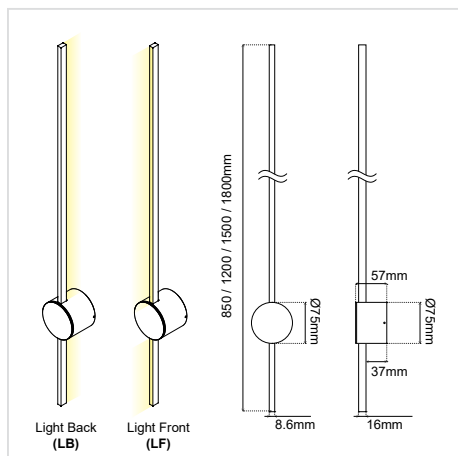

*LIGHT DIRECTION:

Back	(LB)	
Front	(LF)	

*COLOR:

Anodised	(AN)	
Black	(BL)	
White	(WH)	
Graphite	(GF)	
RAL colors	(RL)	
Patina	(PT)	
Nickel plating (upon request)	(NK)	
No color	(NO)	

Continued on next page →

WALL 12 O'CLOCK

CONFIGURATION OPTIONS (cont.)

*VOLTAGE:	WATTAGE:	*CCT:	*CRI:	OUTPUT:	*IP:	*DIMMABLE:
12VDC (V1)	6 W/m	3000K (30K)	Ra80 (80)	228 lm/m	IP20 (20)	Dim (D)
230VAC (V3)		4000K (40K)		246 lm/m	IP44 (44)	Dim 230VAC (DV3)
		6000K (60K)		186 lm/m	IP54 (54)	No dim (L)
		Red (R)			Please get the corresponding Controllers / Dimmers from our wide range of products.	
		Green (G)				
		Blue (B)				
		Gold yellow (CGY)				
		Lemon yellow (CLY)				
		Pink (CPK)				
		Ice blue (CIB)				
		Maldives green (CMG)				
24VDC (V2)	6 W/m	2700K (27K)	Ra80 (80)	222 lm/m		
230VAC (V3)			Ra90 (90)	486 lm/m		
		3000K (30K)	Ra80 (80)	228 lm/m		
			Ra90 (90)	540 lm/m		
		4000K (40K)	Ra80 (80)	246 lm/m		
			Ra90 (90)	600 lm/m		
		6000K (60K)	Ra80 (80)	186 lm/m		
			Ra90 (90)	630 lm/m		
		Red (R)				
		Green (G)				
		Blue (B)				
		Gold yellow (CGY)				
		Lemon yellow (CLY)				
		Pink (CPK)				
		Ice blue (CIB)				
		Maldives green (CMG)				
24VDC (V2)	10 W/m	2700K-6000K Tunable (TN)	Ra96 (96)	969 lm/m		
230VAC (V3)						

* Υποχρεωτική επιλογή / Mandatory option

ΔΗΜΙΟΥΡΓΙΑ ΚΩΔΙΚΟΥ ΠΡΟΪΟΝΤΟΣ / PRODUCT CODE GENERATOR:

12CLC - height - rosette placement - light direction - color - voltage - CCT - CRI - IP - dimmable

ΠΑΡΑΔΕΙΓΜΑ / EXAMPLE:

12CLC-085-R3-LF-BL-V2-30K-80-20-D

for WALL12 O'CLOCK, 850mm, Middle Rosette, Light front - Black, 24VDC, 3000K, Ra80, IP20, dimmable

WALL 12 O'CLOCK MANUAL

ΟΔΗΓΙΕΣ ΕΓΚΑΤΑΣΤΑΣΗΣ INSTALLATION INSTRUCTIONS

ΣΗΜΑΝΤΙΚΟ:

Αυτό το εξάρτημα πρέπει να εγκατασταθεί από εξειδικευμένο ηλεκτρολόγο.

Η BarisLight δεν φέρει ευθύνη για τυχόν ζητήματα που προκύπτουν από ακατάλληλη εγκατάσταση που δεν συμμορφώνεται με τα τοπικά πρότυπα ασφαλείας.

Παρακαλούμε δώστε ένα αντίγραφο αυτών των οδηγιών στο άτομο που είναι υπεύθυνο για τη συντήρηση της εγκατάστασης.

IMPORTANT:

This luminaire must be installed by a qualified electrician.


Disclaimer:

BarisLight is not liable for any issues arising from improper installation that does not comply with local safety standards.

Instructions:

Please provide a copy of these instructions to the person responsible for maintaining the installation.

Εφαρμογή στην επιφάνεια Application on the surface

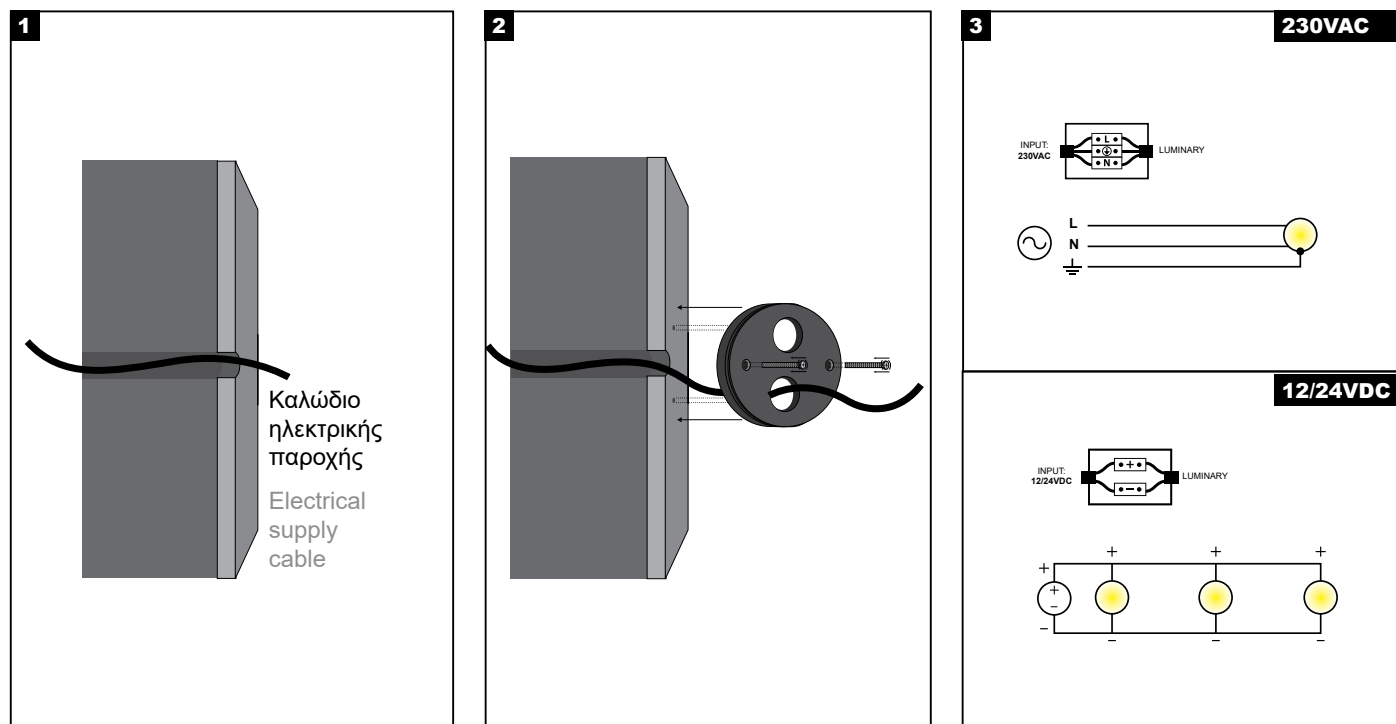

Διαδικασία καλωδίωσης

1. Κλείστε τον κεντρικό διακόπτη ρεύματος.
2. Συνδέστε τα φωτιστικά στη μονάδα παροχής ρεύματος.
3. Συνδέστε τη μονάδα τροφοδοσίας στο ηλεκτρικό δίκτυο.
4. Ενεργοποιήστε τον κεντρικό διακόπτη ρεύματος.

Σημείωση ασφαλείας: Βεβαιωθείτε ότι ο κεντρικός διακόπτης λειτουργίας είναι απενεργοποιημένος κατά τη διάρκεια όλων των διαδικασιών συντήρησης και εγκατάστασης.

Προειδοποίηση: Αποφύγετε τη σύνδεση πάρα πολλών φωτιστικών παράλληλα σε μία μόνο μονάδα τροφοδοσίας για να αποφευχθεί η υπερφόρτωση.

Wiring Procedure

1. Turn off the main power switch.
2. Connect the luminaires to the power supply unit.
3. Connect the power supply unit to the electrical network.
4. Turn on the main power switch.

Safety Notice: Ensure the main power switch is turned off during all maintenance and installation procedures.

Warning: Avoid connecting too many luminaires in parallel to a single power supply unit to prevent overloading.

WALL 12 O'CLOCK MANUAL

