
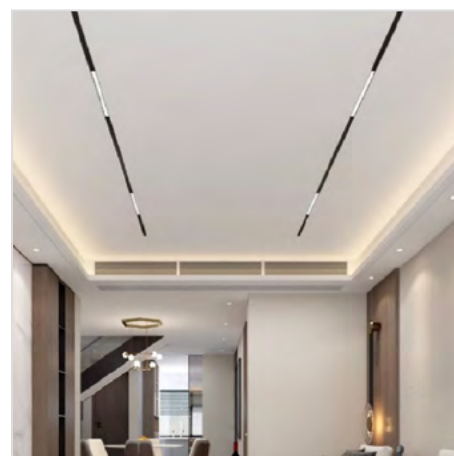
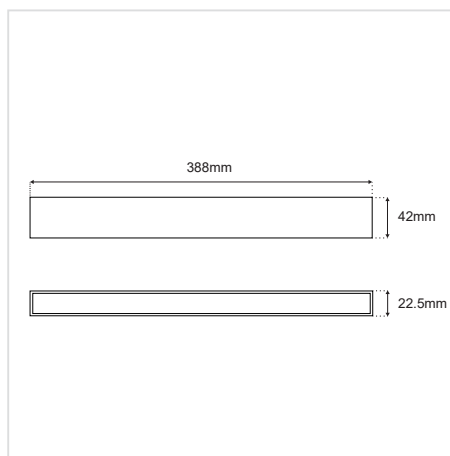


LINEAR40 MAGNETIC MINI 15W DIF 24V



GENERAL INFORMATION

MATERIAL	Aluminium
APPLICATION	For Magnetic Track
DIRECTION OF MOUNTING	Ceiling / Wall
DIMENSIONS (L×W×H)	388 × 22.5 × 42mm
IP CLASSIFICATION	IP20
LIFE TIME	30000 Hours
WARRANTY	3 Years
ORIGIN	PRC


ILLUMINANT

WATTAGE	15W
VOLTAGE	24 VDC
OUTPUT	1015 lm
CRI	Ra90
LED TYPE	OSRAM
COVER	Diffused
DIMMABLE	Yes

COLOR	CCT	SKU	
		DALI, Triac, 0/1-10V Dimmable (External driver)	DALI (Internal driver 24VDC)
Sandy black	3000K	≡4010103-015	≡4010103-195
	4000K	≡4010103-085	≡4010103-196
Sandy white	3000K	≡4010103-078	≡4010103-197
	4000K	≡4010103-086	≡4010103-198

LINEAR40 MAGNETIC MINI 15W DIF 24V

POLAR LIGHT DISTRIBUTION DIAGRAM

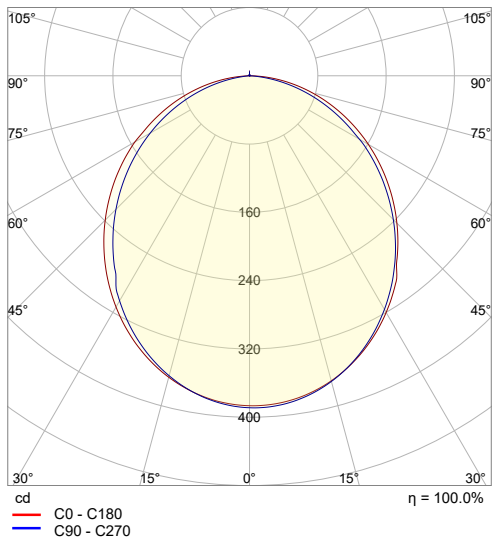

LINEAR INTENSITY DISTRIBUTION

