

MYRO R70 TRIMLESS



ΠΕΡΙΕΧΟΜΕΝΑ | CONTENTS

Datasheet	1
Manual	3
Myro Catalog	5

SKU: **AGTD70-XX-XX-XX-XX-XX**

Reflector color	XX
Wattage	XX
CCT	XX
Beam angle	XX
Extras	XX
Dimmable	XX

DATASHEET

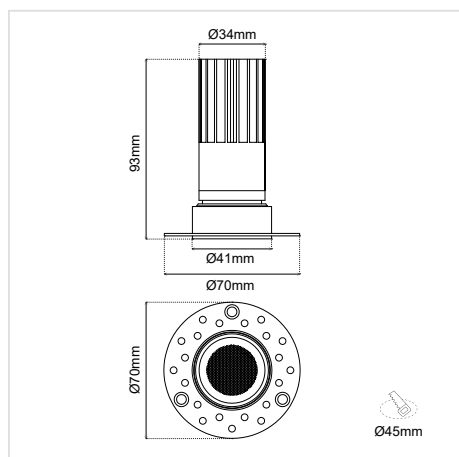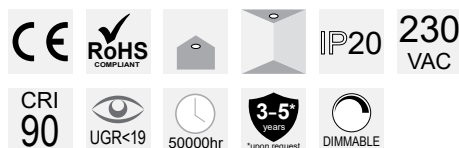

GENERAL INFORMATION

MODEL:	Downlight
APPLICATION:	Indoor
MOUNTING SURFACE:	Ceiling
MOUNTING TYPE:	Recessed Trimless
MATERIAL:	Aluminium
COLOR (BODY):	Black
IP RATING:	IP20
CABLE INCLUDED:	Yes
DRIVER INCLUDED:	Yes
LIFETIME:	50000 hours
WARRANTY:	3-5 years (*5 years upon request)
ORIGIN:	PRC

DIMENSIONS

DIMENSIONS:	Ø 50 × H 93 mm
CUT-OUT DIMENSIONS:	Ø 45 mm
MAX CEILING THICKNESS:	30 mm

ILLUMINANT

LIGHT SOURCE:	LUMINUS LED
VOLTAGE:	230VAC
CRI:	Ra90
UGR:	<19 anti-glare
LPW @3000K, Ra90:	52~72lm/W

CONFIGURATION OPTIONS

*REFLECTOR COLOR:

Matt Black	(BL)	
Matt White	(WH)	
Matt Silver	(SLV)	
Matt Gold	(GL)	
Black Nickel	(NK)	

*WATTAGE:

5W	(5W)
8W	(8W)

*CCT

2700K	(27K)	
3000K	(30K)	
4000K	(40K)	
5000K	(50K)	

Continued on next page →

MYRO R70 TRIMLESS

SKU: **AGTD70** - XX-XX-XX-XX-XX-XX

REFLECTOR COLOR
WATTAGE
CCT
BEAM ANGLE
EXTRAS
DIMMABLE

CONFIGURATION OPTIONS

*BEAM ANGLE

15D	(15D)	
24D	(24D)	
36D	(36D)	

EXTRAS:

Honeycomb	(HC)	
-----------	------	---

*DIMMABLE:

Triac	(DV)
1-10V	(D1)
DALI	(DD)
On/Off	(_)

* Υποχρεωτική επιλογή / Mandatory option

ΔΗΜΙΟΥΡΓΙΑ ΚΩΔΙΚΟΥ ΠΡΟΪΟΝΤΟΣ / PRODUCT CODE GENERATOR:

AGTD70 - Reflector - Wattage - CCT - Beam angle - Extras - Dimmable

ΠΑΡΑΔΕΙΓΜΑ / EXAMPLE:

AGTD70-SLV-5W-30K-36D-HK-

for Myro R70 Trimless, Matt silver reflector, 5W, 3000K, 36D, Honeycomb, On/Off

OUTPUT

WATTAGE:	CCT	BEAM ANGLE	LED OUTPUT	SYSTEM OUTPUT
5W	3000K	15D	405 lm	259 lm
		24D	405 lm	331 lm
		36D	405 lm	359 lm
	4000K	15D	430 lm	278 lm
		24D	430 lm	354 lm
		36D	430 lm	384 lm
8W	3000K	15D	660 lm	399 lm
		24D	660 lm	514 lm
		36D	660 lm	594 lm
	4000K	15D	700 lm	427 lm
		24D	700 lm	550 lm
		36D	700 lm	588 lm

MYRO R70 TRIMLESS MANUAL

ΟΔΗΓΙΕΣ ΕΓΚΑΤΑΣΤΑΣΗΣ INSTALLATION INSTRUCTIONS

ΣΗΜΑΝΤΙΚΟ:

Αυτό το εξάρτημα πρέπει να εγκατασταθεί από εξειδικευμένο ηλεκτρολόγο.

Η BarisLight δεν φέρει ευθύνη για τυχόν ζητήματα που προκύπτουν από ακατάλληλη εγκατάσταση που δεν συμμορφώνεται με τα τοπικά πρότυπα ασφαλείας.

Παρακαλούμε δώστε ένα αντίγραφο αυτών των οδηγιών στο άτομο που είναι υπεύθυνο για τη συντήρηση της εγκατάστασης.

IMPORTANT:

This luminaire must be installed by a qualified electrician.


Disclaimer:

BarisLight is not liable for any issues arising from improper installation that does not comply with local safety standards.

Instructions:

Please provide a copy of these instructions to the person responsible for maintaining the installation.

ΣΥΝΔΕΣΗ ΜΕ ΤΗΝ ΗΛΕΚΤΡΙΚΗ ΠΑΡΟΧΗ CONNECTION TO THE ELECTRICAL SUPPLY



Διαδικασία καλωδίωσης

1. Κλείστε τον κεντρικό διακόπτη ρεύματος.
2. Συνδέστε τα φωτιστικά στη μονάδα παροχής ρεύματος.
3. Συνδέστε τη μονάδα τροφοδοσίας στο ηλεκτρικό δίκτυο.
4. Ενεργοποιήστε τον κεντρικό διακόπτη ρεύματος.

Σημείωση ασφαλείας: Βεβαιωθείτε ότι ο κεντρικός διακόπτης λειτουργίας είναι απενεργοποιημένος κατά τη διάρκεια όλων των διαδικασιών συντήρησης και εγκατάστασης.

Προειδοποίηση: Αποφύγετε τη σύνδεση πάρα πολλών φωτιστικών παράλληλα σε μία μόνο μονάδα τροφοδοσίας για να αποφευχθεί η υπερφόρτωση.

Wiring Procedure






1. Turn off the main power switch.
2. Connect the luminaires to the power supply unit.
3. Connect the power supply unit to the electrical network.
4. Turn on the main power switch.

Safety Notice: Ensure the main power switch is turned off during all maintenance and installation procedures.

Warning: Avoid connecting too many luminaires in parallel to a single power supply unit to prevent overloading.

MYRO R70 TRIMLESS MANUAL

Τοποθέτηση Installation

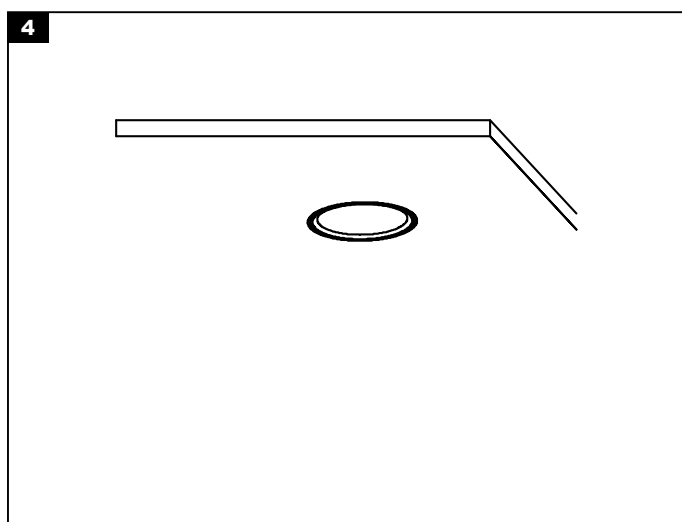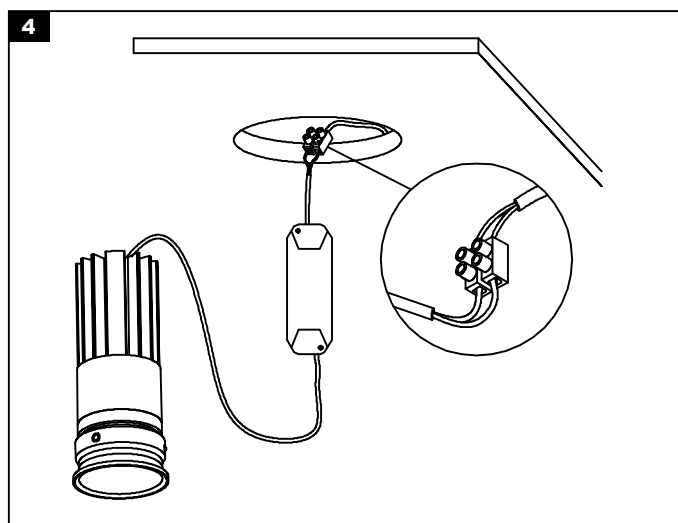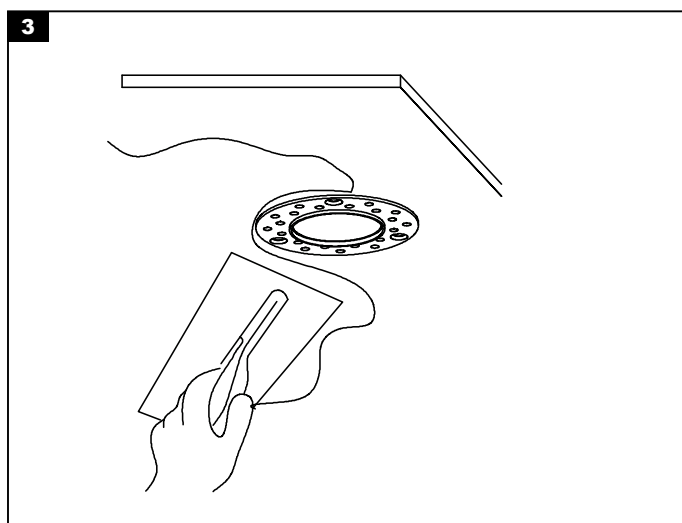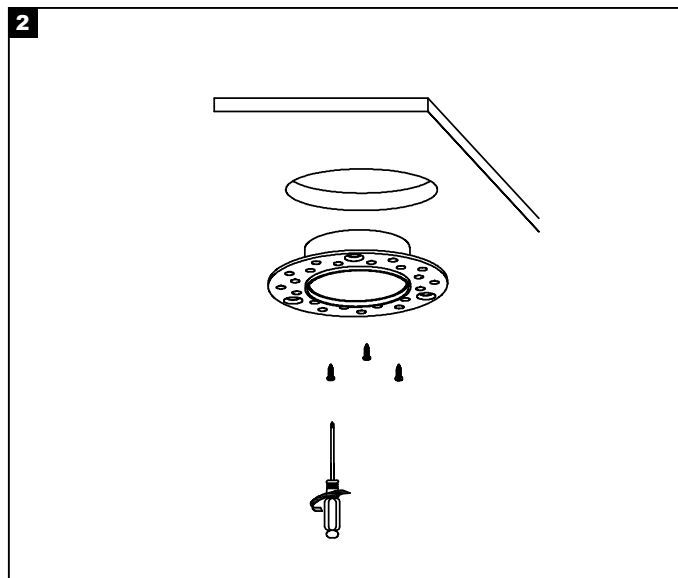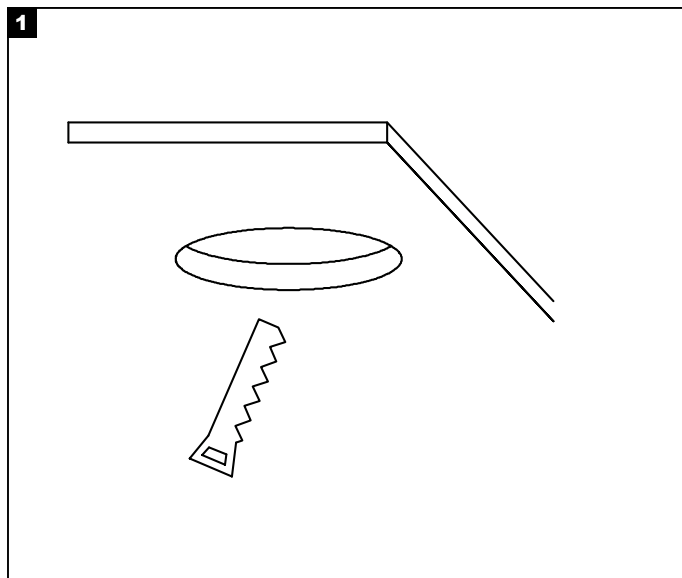

Η εγκατάσταση του προϊόντος πρέπει να γίνεται από αδειούχο ηλεκτρολόγο εγκαταστάτη. The product must be installed by a licensed electrical installer.

MYRO R70 TRIMLESS

MYRO by BARISLIGHT



MYRO R50 RECESSED

(SKU: A81050)

DIMENSIONS (ØxH):	50 x 93 mm
CUT-OUT (Ø):	45 mm
IP RATING:	IP20
WATTAGE:	58W
CCT:	2700K/3000K/4000K
CRI:	Ra90
BEAM ANGLE:	150/240/360
DIMMING:	On/Off
FRAME FINISH:	☒ Black ☐ White ☐ Grey ☐ Gold ☐ Silver
REFLECTOR:	☒ Black ☐ White ☐ Grey ☐ Gold ☐ Silver



MYRO R70 TRIMLESS

(SKU: A81070)

DIMENSIONS (ØxH):	70 x 93 mm
CUT-OUT (Ø):	45 mm
IP RATING:	IP20
WATTAGE:	58W
CCT:	2700K/3000K/4000K
CRI:	Ra90
BEAM ANGLE:	150/240/360
DIMMING:	On/Off, Triac, 1-10V, DALI
REFLECTOR:	☒ Black ☐ White ☐ Grey ☐ Gold ☐ Silver



MYRO R50 RECESSED ADJUSTABLE

(SKU: A81050J)

DIMENSIONS (ØxH):	50 x 97 mm
CUT-OUT (Ø):	45 mm
IP RATING:	IP20
TILTABLE:	25°
WATTAGE:	58W
CCT:	2700K/3000K/4000K
CRI:	Ra90
BEAM ANGLE:	150/240/360
DIMMING:	On/Off
FRAME FINISH:	☒ Black ☐ White ☐ Grey ☐ Gold ☐ Silver
REFLECTOR:	☒ Black ☐ White ☐ Grey ☐ Gold ☐ Silver



MYRO R70 TRIMLESS ADJUSTABLE

(SKU: A81070J)

DIMENSIONS (ØxH):	70 x 97 mm
CUT-OUT (Ø):	45 mm
IP RATING:	IP20
TILTABLE:	25°
WATTAGE:	58W
CCT:	2700K/3000K/4000K
CRI:	Ra90
BEAM ANGLE:	150/240/360
DIMMING:	On/Off, Triac, 1-10V, DALI
FRAME FINISH:	☒ Black ☐ White ☐ Grey ☐ Gold ☐ Silver