


# OVAL 2




## ΠΕΡΙΕΧΟΜΕΝΑ / CONTENTS

datasheet	1
manual	2

## ΚΩΔΙΚΟΣ / CODE

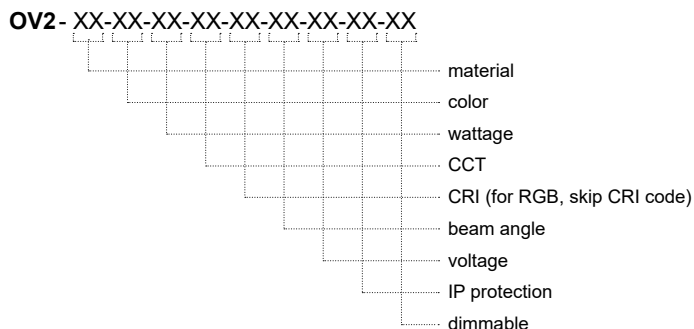

## OVAL 2 (OV2) / Datasheet

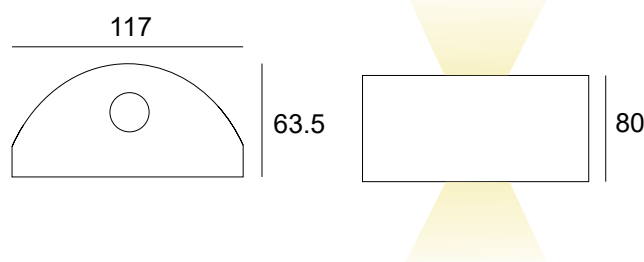

### General information

Application	Indoor / Outdoor
Direction of mounting	Ceiling / Wall / Ground
LED	Cree / Osram
Life time	50000 hrs
Warranty	3-5 years (*5 years upon request)
Origin	Greece
Visible dimensions (W×H×L)	117 × 63.5 × 80 mm

Material	Color	Wattage	CCT	CRI	Beam angle	Voltage	IP	Dimmable
Aluminium (01)	Anodised (AN)	0.5W (05W)	2700K (27K)	Ra80 (80)	Diffuse (DF)	12VDC (V1)	IP20 (20)	Yes (D)
Inox (02)	Black (BL)	1W (1W)	3000K (30K)	Ra90 (90)	8° (8D)	24VDC (V2)	IP54 (54)	No (L)
Brass (03)	White (WH) RAL colors (RL)	2W (2W)	4000K (40K)		15° (15D)	230VAC (V3)	IP65 (65)	
		2.5W (25W)	5000K (50K)		20° (20D)	12/24V (V4)		
		3W (3W)	6000K (60K)		25° (25D)	350mA (V5)		
			(R)/(G)/(B)/(A)		36° (36D)	500mA (V6)		
			RGB (C1)		45° (45D)	700mA (V7)		
						60° (60D)		
				80° (80D)				




Δημιουργία Κωδικού προϊόντος / Product Code generator

**OV2 - material - color - wattage - CCT - CRI - beam angle - voltage - IP - dimmable**



(ex. OV2-01-AN-1W-27K-80-8D-V1-54-D for Oval 2 Aluminium Anodised 1W 2700K Ra80 8° 12VDC IP54 Dimmable)

## OVAL 2 / Manual

1. ΠΡΟΕΤΟΙΜΑΣΙΑ ΓΙΑ ΕΦΑΡΜΟΓΗ ΣΤΟΝ ΤΟΙΧΟ / PREPARATION FOR WALL APPLICATION
2. ΤΟΠΟΘΕΤΗΣΗ ΒΑΣΗΣ ΣΤΟΝ ΤΟΙΧΟ / APPLICATION OF BASE ON WALL
3. ΚΑΝΕΤΕ ΤΗΝ ΗΛΕΚΤΡΙΚΗ ΣΥΝΔΕΣΗ / MAKE THE ELECTRICAL CONNECTION
4. ΤΟΠΟΘΕΤΗΣΗ ΤΟΥ ΦΩΤΙΣΤΙΚΟΥ / PLACE THE LUMINARY

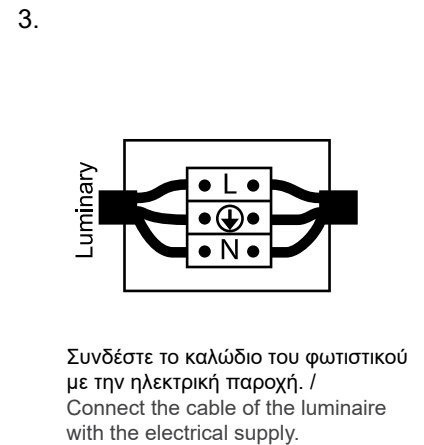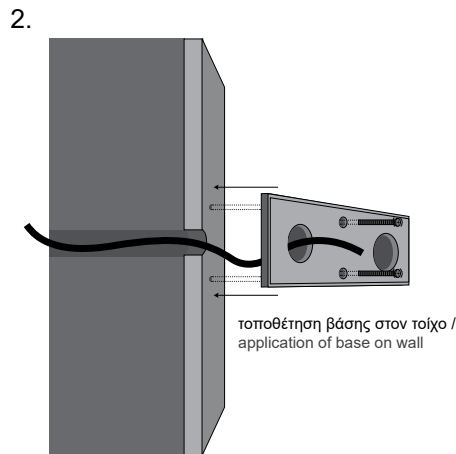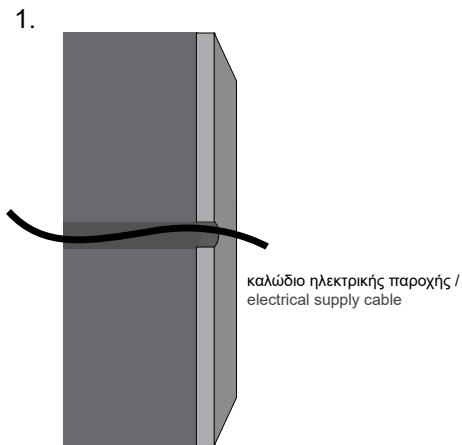

4. Εφαρμογή στον τοίχο /  
Application on the wall

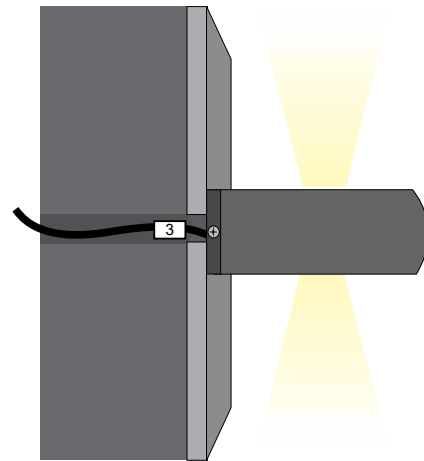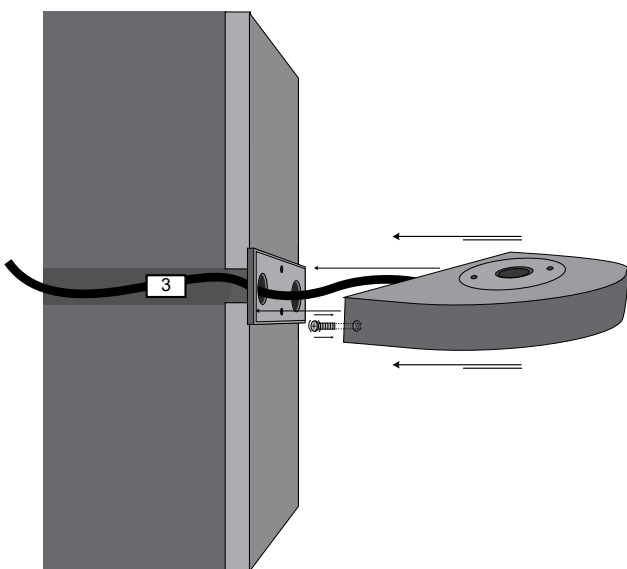

Εφαρμόστε το φωτιστικό στην τοποθετημένη βάση και βιδώστε το πάνω της με δεξιόστροφη περιστροφή μέχρι να σταθεροποιηθεί. /  
Apply the lamp to the mounted base and tighten it with a clockwise rotation until it is firmly stabilized on the base.