



**Features :**


- 100-264V input voltage
- High operating temperature up to 60°C
- Protection: Short circuit/overload/over voltage
- Cooling by free air convection
- High efficiency, long life and high reliability
- 100% full load burn-in test
- 3 years warranty

**Specification**


CE RoHS BIS SELV IP20

	Model	HRU-48-12	HRU-48-24
<b>Output</b>	DC Voltage	12V	24V
	Voltage Tolerance	±0.5V	
	Rated Current	0 – 4A	0 – 2A
	Rated Power	48W	48W
	Ripple & Noise	150mVp-p	150mVp-p
<b>Input</b>	Voltage Range	100-264VAC	
	Frequency Range	50 – 60HZ	
	Power Factor	PF≥0.5/220VAC ( Full loading )	
	Full Load Efficiency(Typ.)	85% ( 230AC)	86% (230AC)
	AC Current (Max.)	1.96A/100AC, 0.88A/230VAC	
	Leakage current	<0.5mA/260VAC	
	Inrush current	≤ 40A	
<b>Protection</b>	Short Circuit	Protection type: Hiccup mode, recovers automatically after fault condition is removed.	
	Over Load	Hiccup mode, recovers automatically after fault condition is removed	
	VIBRATION	10-500Hz 2G10min	
	BURNT-IN TEST	Input voltage: 220V 50Hz rated output current 25°C Bum-in 2h	
<b>Environment</b>	Over temperature	100°C±10°C shut down o/p voltage, re-poweron to recover	
	Working TEMP.	-20 ~ + 50°C	
	Working Humidity	20~60%RH,non-condensing	
	Storage TEM.,Humidity	-20~+ 80%, 10~95%RH	
	START RISE HOLD TIME	1000ms, 20ms, 50ms/230VAC at full load	
<b>Safety &amp; EMC</b>	Vibration	10 –500Hz, 5G 12min./1 cycle, period for 60min.each along X,Y,Z axes.	
	Safety standards	CE Mark	
	Withstand voltage	I/P-O/P:1.5KVAC I/P-GND:1.5KVAC	
	EMC Immunity	EN55015:2013;EN61547:2009; EN61000-3-2:2014; EN61000-3-3:2013	
<b>Others</b>	Weight	110g	
	Dimension	298x18x15mm(LxWxH)	
	Packing	200PCS/CTN	
<b>Notes</b>	1. All parameters NOT specially mentioned are measured at 230VAC input , rated load and 25°C of ambient temperature. 2. Tolerance: includes set up tolerance, line regulation and load regulation . 3. The power supply is considered as a component that will be operated in combination with final Equipment. Since EMC performance will be affected by the complete installation, the final equipment manufactures must be-qualifyEMC Directive on the complete installation again.		

**Mechanical Specification**

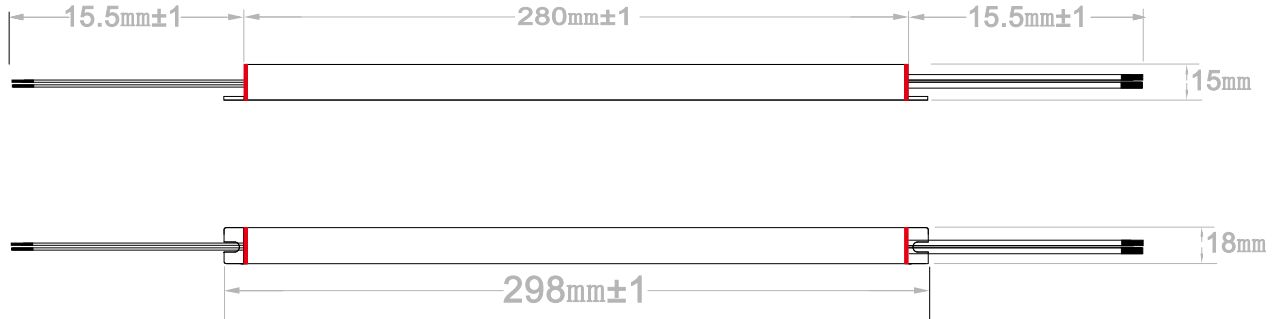

**Derating Curve**

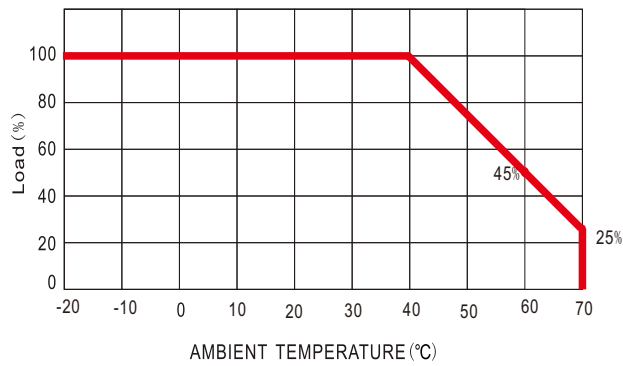

**Package**

DIMENSION	298x18x15 (mm) (L×W×H)
CARTON QUANTITY	200PCS/Carton
CARTON SIZE	55x33x19.5(CM)
WEIGHT	110g/PCS