


# Focusing cover DILENSO-22 30DEG

Ref. B17173T

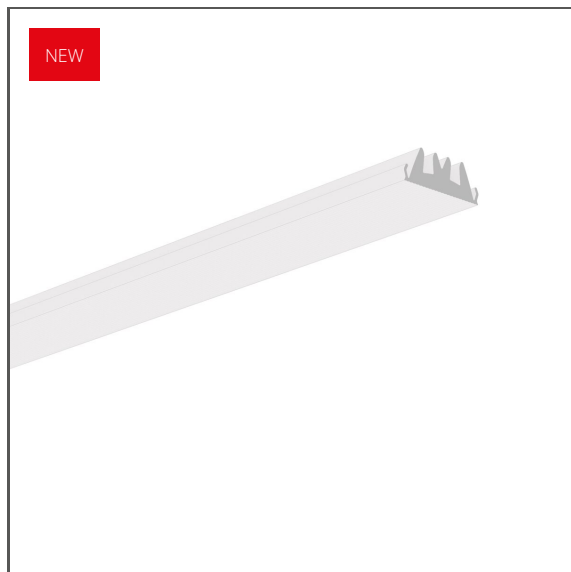

- Focusing the light flux
- Limited chromatic aberration at the edges of the cover
- Resistance to weather conditions

## APPLICATION

- LED protection and light focusing in lighting fixtures


## MOUNTING

- Snapped in a dedicated profile

## ADDITIONAL INFORMATION

- standard lengths of KLUŚ profiles and covers: 1000 mm (tolerance  $\pm 1.5$  mm) and 2005 mm / 3010 mm (tolerance + 5 mm); for selected covers: 6050 mm, 10050 mm (tolerance + 5 mm)
- when choosing a different length of profiles / covers than available in the standard, you should additionally choose the cutting service at KLUŚ

## TECHNICAL DRAWING



## TECHNICAL SPECIFICATIONS

Finish	semi-transparent
Material	PC
Shape	flat
Maximum length on request	6000 mm
Light transmission	63 %
Width	22 mm
Kąt soczewki Min	30°
Focusing light	yes
UV resistance	yes

Length	Ref
1000 mm	B17173T_1
2005 mm	B17173T_2
3010 mm	B17173T_3

# Focusing cover DILENSO-22 30DEG

Ref. B17173T

## RELATED PROFILES > ARCHITECTURAL



**GIZA-LL**  
A00758



**GIZA-LL-T**  
A02479



**GIZA-LL-UST**  
A02724N



**DIPOKET**  
A01177



**DIPOK-US**  
A01233