

Fastener FI-8-LIN-ZMZ

Ref. C28171N00, C28171L10, C28171L07

Ref. arch 42286, 42286L9010, 42286L9005



- Lengthwise suspension on a wire
- Single pole conductivity possible
- Minimum dimensions

APPLICATION

- for suspending LED lighting fixtures


MOUNTING

- to the lighting fixture, using a small lock
- to the wire with a pressure screw

ADDITIONAL INFORMATION

- spare power connector included (100 mm)

TECHNICAL DRAWING

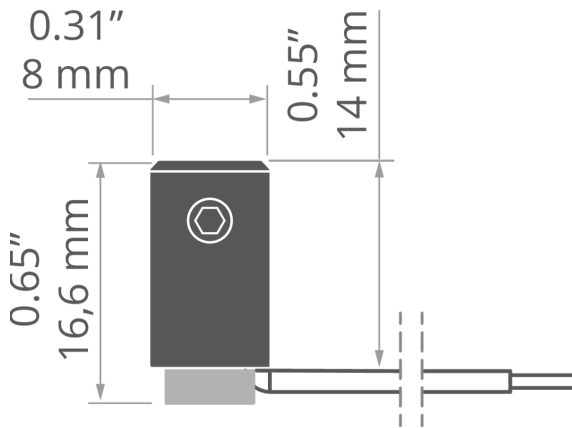

TECHNICAL SPECIFICATIONS

Width	8 mm
Height	16.6 mm
Conducting electricity	yes
Working temperature	60°C
Lifting capacity	10 kg
Maximum current	5 A
Loss of voltage	0.05 V

Material	Color	Ref
stainless steel, steel, PA, EPDM	■ silver	C28171N00 42286
aluminum, PA, EPDM	□ white	C28171L10 42286L9010
aluminum, PA, EPDM	■ black	C28171L07 42286L9005

Fastener FI-8-LIN-ZMZ


Ref. C28171N00, C28171L10, C28171L07

Ref. arch 42286, 42286L9010, 42286L9005

RELATED PROFILES > ARCHITECTURAL



3035
A18039
Ref. arch 18039



3035-O
A08441
Ref. arch B8441



4050
A18050
Ref. arch 18050



4050-W
A18051
Ref. arch 18051




GIZA
A05556
Ref. arch B5556



GIZA-DUO-LL
A02162
Ref. arch C2162



GIZA-LL
A00758
Ref. arch C0758



JAZ
A08547
Ref. arch B8547



LIPOD
A05554
Ref. arch B5554



OPK-4
A00370
Ref. arch C0370

RELATED PROFILES > MINIMALISTIC



PIKO-ZM
A01168
Ref. arch C1168

RELATED PROFILES > UNIVERSAL



OLEK
A08505
Ref. arch B8505




PDS-ZM-PLUS
A02056
Ref. arch C2056

Fastener FI-8-LIN-ZMZ

Ref. C28171N00, C28171L10, C28171L07

Ref. arch 42286, 42286L9010, 42286L9005

RELATED SYSTEMS > GENERAL LIGHTING SYSTEMS



3035-KOZE
A08441+A18056
Ref. arch 18056+B8441



PK-4
A18044+A00370
Ref. arch 18044+C0370