


LED strip KWP-GHD-0480-24

Ref. KWP-GHD-0480-24



Dimensions: Width [W]: 10 mm | Max run length [L]: 10 m | Cut every [C]: 33.3 mm | LED spacing [D]: 4.16 mm | Height [H]: 3 mm

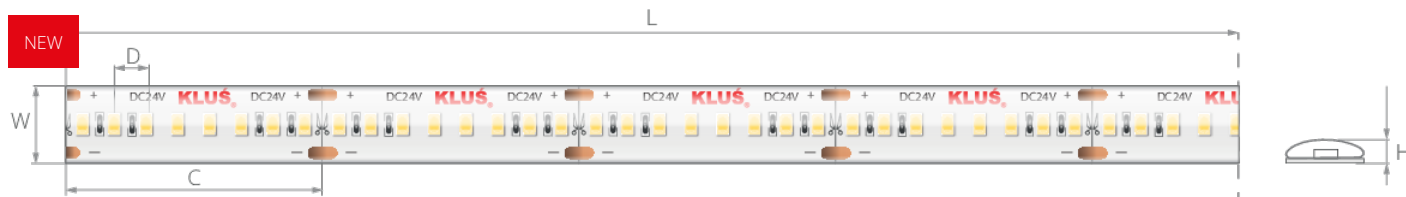

- High lighting efficacy
- High density diode placement
- Energy class: E
- For the construction of sealed lighting fixtures

TECHNICAL SPECIFICATIONS

IP protection rating	65
Sealing type	gel cover
CRI	90
LxBy	L80B50
Lifetime	60000 h
Working temperature	-20°C - 60°C
Input voltage	24 V DC
Power consumption	4.8 W/m
Beam angle	120°
MacAdam's ellipse	3 SDCM
Number of LEDs per 1 m	240
Number of LEDs per cut section	7 pcs
Energy consumption	5 kWh/1000h
Does not contain mercury and lead	yes
Dimmable	yes
No UV IR radiation	yes
Warranty [months]	48

Color temperature	Lumen output	Efficiency	Ref
2700 K	550 lm/m	114 lm/W	KWP-GHD27-0480-24
3000 K	585 lm/m	121 lm/W	KWP-GHD30-0480-24
3500 K	585 lm/m	121 lm/W	KWP-GHD35-0480-24
4000 K	605 lm/m	126 lm/W	KWP-GHD40-0480-24
5000 K	585 lm/m	121 lm/W	KWP-GHD50-0480-24