


Cover LIGER-11

Ref. B17037S, B17037B

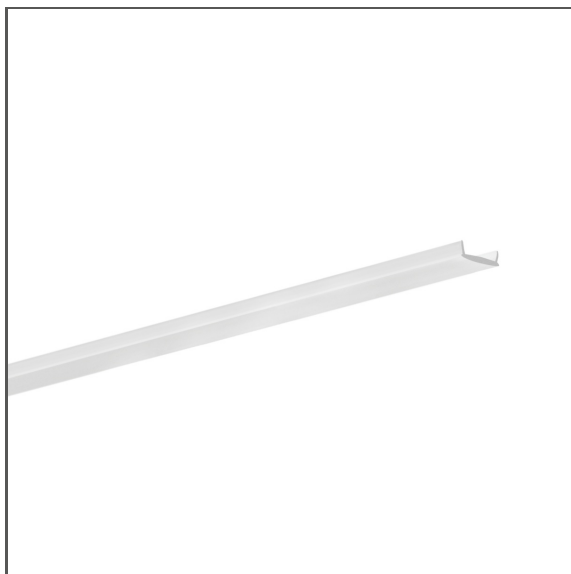

- Excellent light dispersion
- Recommended for bent profiles
- Made of PC with increased resistance to weather conditions

APPLICATION

- LED protection and light diffusion in lighting fixtures

MOUNTING

- Snapped in a dedicated profile

ADDITIONAL INFORMATION

- standard lengths of KLUŚ profiles and covers: 1000 mm (tolerance ± 1.5 mm) and 2005 mm / 3010 mm (tolerance + 5 mm); for selected covers: 6050 mm, 10050 mm (tolerance + 5 mm)
- when choosing a different length of profiles / covers than available in the standard, you should additionally choose the cutting service at KLUŚ

TECHNICAL DRAWING



TECHNICAL SPECIFICATIONS

Material	PC
Shape	flat
Maximum length on request	10000 mm
Width	12.4 mm
Possibility of obtaining a line of light	yes
Possibility of twisting	yes

Finish	Light transmission	Length	Ref
satin	59 %	1000 mm	B17037S_1
		2005 mm	B17037S_2
		3010 mm	B17037S_3
black	21 %	1000 mm	B17037B_1
		2005 mm	B17037B_2
		3010 mm	B17037B_3

RELATED PROFILES > ARCHITECTURAL



KOZMA
A18040



OPK-4
A00370




PDS-T
A02057




PDS-UST
A02725


RELATED PROFILES > FOR MAIN LIGHTING



DES
A18030



MOD-100
A18049



MOD-50
A18047

RELATED PROFILES > FOR SCONCES AND WALL LIGHTING



LIT-L
A18033



OBIT
A04826



PLAKIN-DUO
A04106A

RELATED PROFILES > ILLUMINATION OF COVES AND ARCHITECTURAL NICHES



NISA-KON
A18027



NISA-KRA
A18026



NISA-NI
A18029



POLI
A07176

RELATED PROFILES > STAIRS ILLUMINATION



POR
A06144



STEP
A18042

RELATED PROFILES > UNIVERSAL



45-16
A08504



45-ALU
A04023



KUBIK-45
A07697



MICRO-H
A00599



MICRO-HG
A01419



MICRO-NK
A01587



MICRO-PLUS
A02966



OLEK
A08505



PDS-4-PLUS
A01263




PDS-H
A09204



PDS-NK
A01588




PDS-ZM-PLUS
A02056




PDS-ZMG
A01418

RELATED SYSTEMS > GENERAL LIGHTING SYSTEMS



MOD-100
18049



MOD-50
18047



PK-4
A18044+A00370