


Profile PAC-ALU

Ref. A04370

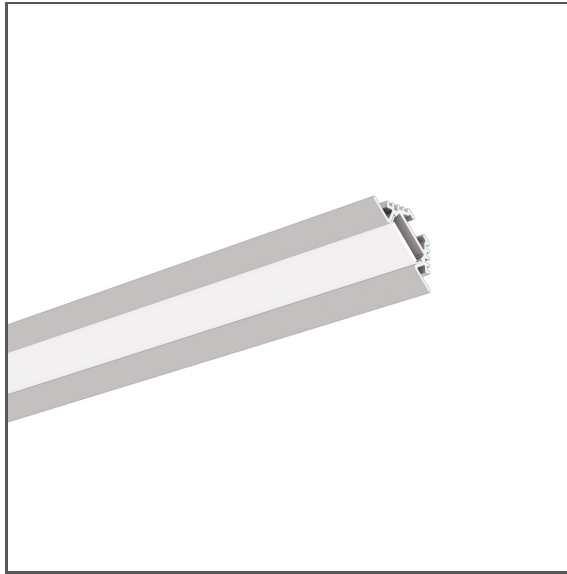

- Installation in corners
- Corner masking
- Lighting at a 45° angle

APPLICATION

- furniture, under-cabinet and decorative lighting


MOUNTING

- to the surface, using dedicated accessories, mounting adhesive or properly selected screws

ADDITIONAL INFORMATION

- standard lengths of KLUŚ profiles and covers: 1000 mm (tolerance ± 1.5 mm) and 2005 mm / 3010 mm (tolerance + 5 mm); for selected covers: 6050 mm, 10050 mm (tolerance + 5 mm)
- when choosing a different length of profiles / covers than available in the standard, you should additionally choose the cutting service at KLUŚ

TECHNICAL DRAWING

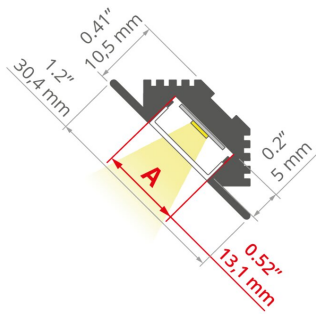


TECHNICAL SPECIFICATIONS


Material	aluminum
Color	■ silver anodized
Possible fixture IP	20, 65
Possible fixture shapes	linear, polygonal
Profile cross-section	angled
Width	30.4 mm
Height	10.5 mm
LED gluing width A	13.1 mm
Number of LED strips A (8 mm wide)	1
Width of the glow	13.2 mm
Max power of a single KLUŚ LED strip	24 W/m
Lighting at an angle	45
Building type	Residential, Retail, HoReCa object
Facility zone	office, kitchen, bathroom, furniture, niche/cove, advertising / POS, shop windows and exhibition
Wire out back of extrusion	yes

Length	Ref
1000 mm	A04370A_1
2005 mm	A04370A_2
3010 mm	A04370A_3

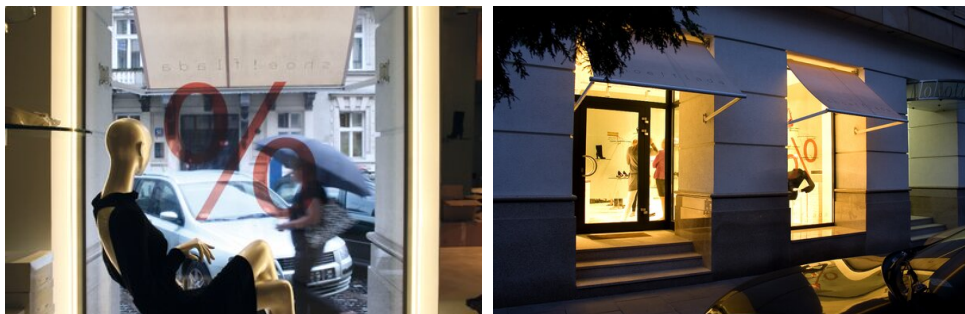

SAMPLE PROJECTS




RELATED ACCESSORIES > COVERS

NAME	MATERIAL	MATERIAL TRANSMITTANCE	COLOR	REF.
Cover KA-13	 PC	72 %	frosted	B17066F
		91 %	clear	B17066C

RELATED ACCESSORIES > END CAPS

NAME	MATERIAL	COLOR	REF.
End cap PAC-ALU	 PP	 gray	C20107C02


RELATED ACCESSORIES > RELATED LED > ADJUSTABLE WHITE / DIM TO WARM

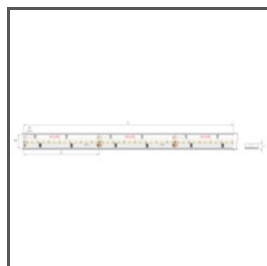

KWP-27T50-1440-24
KWP-27T50-1440-24




K-27T50-1440-24
K-27T50-1440-24

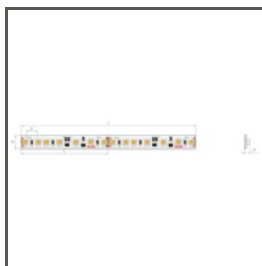


K-18D30-0960-24
K-18D30-0960-24


RELATED ACCESSORIES > RELATED LED > CRI 95+

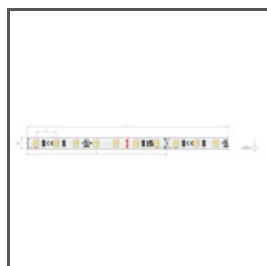

K-CR-0480-24
K-CR-0480-24



K-CR-0960-24
K-CR-0960-24

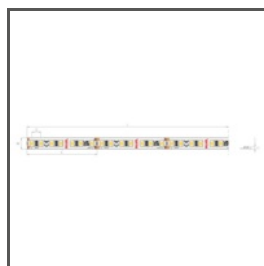


K-CR-1440-24
K-CR-1440-24




KWP-CRHD-1820-24
KWP-CRHD-1820-24



KWP-CRHD-1910-24
KWP-CRHD-1910-24




KWP-CR-0960-24
KWP-CR-0960-24



KWP-CR-0480-24
KWP-CR-0480-24

RELATED ACCESSORIES > RELATED LED > HIGH EFFICACY

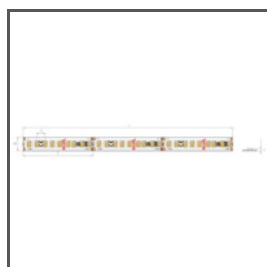

K-VHE-0480-24
K-VHE-0480-24



K-VHE-0960-24
K-VHE-0960-24




K-VHE-1440-24
K-VHE-1440-24


RELATED ACCESSORIES > RELATED LED > RGB / RGB-W / RGB-CCT



K-RGBW-1530-24
K-RGBW-1530-24



K-RGB-1920-120-24
K-RGB-1920-120-24



KWP-RGB-1920-120-24
KWP-RGB-1920-120-24



K-RGB-1200-24
K-RGB-1200-24



K-RGB-0700-24
K-RGB-0700-24




KWP-RGB-1275-24
KWP-RGB-1275-24




KWP-RGBW-1530-24
KWP-RGBW-1530-24



KWP-GRGBW-1530-24
KWP-GRGBW-1530-24



KWP-RGB-0700-24
KWP-RGB-0700-24



KWP-RGB-1200-24
KWP-RGB-1200-24


RELATED ACCESSORIES > RELATED LED > WHITE MONO



K-1910-HD-24
K-HD-1910-24




KWP-1220-24
KWP-1220-24




K-2300-24
K-2300-24




K-0960-24
K-0960-24



K-0480-24
K-0480-24




K-1440-24
K-1440-24

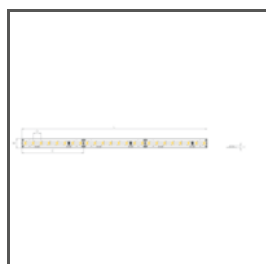

K-2400-24
K-2400-24



K-HD-0480-24
K-HD-0480-24




K-HD-0960-24
K-HD-0960-24



K-HD-1440-24
K-HD-1440-24




KWP-HD-1910-24
KWP-HD-1910-24



KWP-1440-24
KWP-1440-24



KWP-0480-24
KWP-0480-24



KWP-0960-24
KWP-0960-24



KWP-GHD-0480-24
KWP-GHD-0480-24



KWP-GHD-0960-24
KWP-GHD-0960-24



KWP-GHD-1440-24
KWP-GHD-1440-24

NEW


NEW

NEW

RELATED ACCESSORIES > OTHER RELATED ACCESSORIES > CONNECTORS



CONNECTOR
ZM



CONNECTOR
ZM-NA

RELATED ACCESSORIES > OTHER RELATED ACCESSORIES > OTHER



HERMETIC COUPLER
THB.391.A4A, 4 pin
C42268C10



HERMETIC COUPLER
THB.381, 2pin
C28125C07



HERMETIC COUPLER
THB.391.A5A, 5 pin
C28156C07



JOINT CONNECTOR
THB.200.E5E, 5 pin
C28157C07

RELATED ACCESSORIES > ELECTRONICS > SWITCHES



UNI-11
E61603



UNI-P
E61580