


Profile PIKO-O

Ref. A01167

Ref. arch C1167



- Lighting fixture with round cross-section
- Minimum cross-section diameter
- Smooth profile surfaces
- Luminaire direction adjustment
- Small bending radius

APPLICATION

- decorative lighting and functional


MOUNTING

- suspended, using dedicated accessories
- easy assembly and disassembly by snapping in and out

ADDITIONAL INFORMATION

- for suspending small-size profiles, it is recommended to use a wire with a diameter of 0.5 mm
- standard lengths of KLUŚ profiles and covers: 1000 mm (tolerance ± 1.5 mm) and 2005 mm / 3010 mm (tolerance + 5 mm); for selected covers: 6050 mm, 10050 mm (tolerance + 5 mm)
- when choosing a different length of profiles / covers than available in the standard, you should additionally choose the cutting service at KLUŚ

TECHNICAL DRAWING



TECHNICAL SPECIFICATIONS

Material	aluminum
Possible fixture IP	20
Possible fixture shapes	linear, round
Profile cross-section	round
Width	10.5 mm
Height	7 mm
LED gluing width A	6 mm
Max power of a single KLUŚ LED strip	9.6 W/m
Lighting angle adjustment up to	360
Possibility of obtaining a line of light	yes
Possibility of bending	yes
Radius of the light arc	yes
Inward	150 mm
Outward	1000 mm
Building type	Retail, Entertainment/ Arts, HoReCa object
Facility zone	furniture, bathroom, kitchen, office, advertising / POS, shop windows and exhibition

Color	Length	Ref
■ silver anodized	1000 mm	A01167A_1 C1167ANODA_1
	2005 mm	A01167A_2 C1167ANODA_2
	3010 mm	A01167A_3 C1167ANODA_3
■ black anodized	1000 mm	A01167A07_1 C1167K7_1
	2005 mm	A01167A07_2 C1167K7_2
	3010 mm	A01167A07_3 C1167K7_3
□ white lacquered	1000 mm	A01167L100D_1 C1167L90100D_1
	2005 mm	A01167L100D_2 C1167L90100D_2
	3010 mm	A01167L100D_3 C1167L90100D_3


Profile PIKO-O

Ref. A01167


Ref. arch C1167

Easy assembly and disassembly by snapping in and out	yes
The cover is cut to the length of the profile	yes
Wire out end cap	yes
Wire out back of extrusion	yes



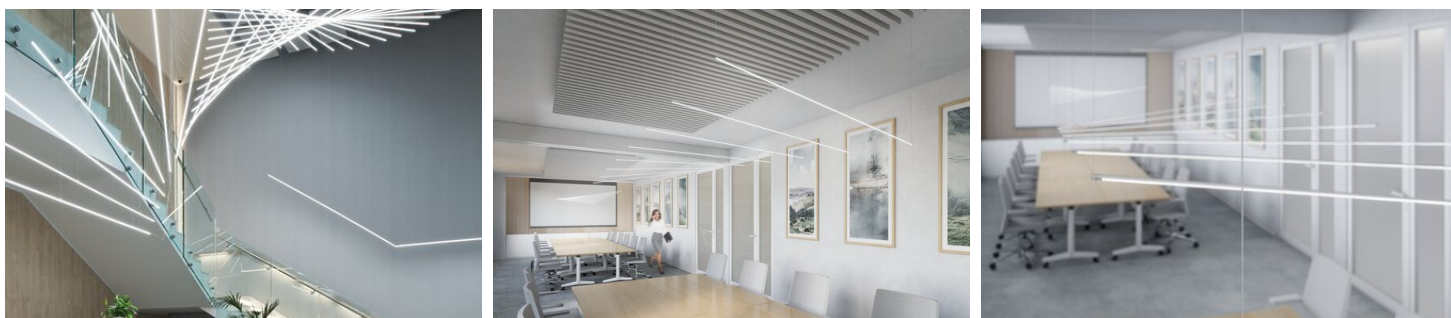







SAMPLE PROJECTS



RELATED ACCESSORIES > COVERS

NAME	MATERIAL	MATERIAL TRANSMITTANCE	COLOR	REF.
PIKO		63 %	satin	B17164F 17164
		42 %	black	B17164B 17088
		87 %	semi-transparent	B17164T 17090

RELATED ACCESSORIES > END CAPS

NAME	MATERIAL	COLOR	REF.
PIKO-O-90	 PA12	 black	C24369C7015 24369
PIKO-O	 ABS	 silver	C28223C7012 42631
		 white	C24321C10 24413
		 black	C24321C07 24327
PIKO-O-OTW	 ABS	 gray	C24321C02TW 24376
		 white	C24321C10TW 24414
		 black	C24321C07TW 24360


RELATED ACCESSORIES > RELATED LED > BENDABLE



K-BT-0910-24

K-BT-0910-24

RELATED ACCESSORIES > RELATED LED > RGB / RGB-W / RGB-CTT



K-1560-RGB-24V

K-RGB-1560-24

Ref. arch K-1560-RGB-24V

RELATED ACCESSORIES > RELATED LED > ULTRATHIN



K-1091-24V

K-1091-24

Ref. arch K-1091-24V

RELATED ACCESSORIES > RELATED LED > WHITE MONO



K-SHD-0960-24

K-SHD-0960-24

Profile PIKO-O

Ref. A01167

Ref. arch C1167

RELATED ACCESSORIES > OTHER RELATED ACCESSORIES > FASTENERS AND HEADS FOR PROFILES



FASTENER
PLD-10-PP
C28175N00
Ref. arch 42291



FASTENER
PLD-10-WL
C28177N00
Ref. arch 42293



FASTENER
PLD-10-WP
C28176N00
Ref. arch 42292

RELATED ACCESSORIES > OTHER RELATED ACCESSORIES > MOUNTING BRACKETS



MOUNTING BRACKET
PLD-10
C24375C00
Ref. arch 24375