


Profile PIKO

Ref. A08288

Ref. arch B8288

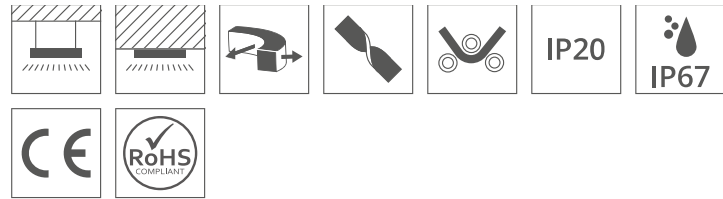

- Minimum width and height
- Small bending radius

APPLICATION

- furniture and decorative lighting


MOUNTING

- to the surface, suspended or recessed, using dedicated accessories, with double-sided adhesive tape or mounting adhesive
- easy assembly and disassembly by snapping in and out

ADDITIONAL INFORMATION

- for suspending small-size profiles, it is recommended to use a wire with a diameter of 0.5 mm
- standard lengths of KLUŚ profiles and covers: 1000 mm (tolerance ± 1.5 mm) and 2005 mm / 3010 mm (tolerance + 5 mm); for selected covers: 6050 mm, 10050 mm (tolerance + 5 mm)
- when choosing a different length of profiles / covers than available in the standard, you should additionally choose the cutting service at KLUŚ

TECHNICAL DRAWING



TECHNICAL SPECIFICATIONS

Material	aluminum
Possible fixture IP	20, 67
Possible fixture shapes	linear, round
Profile cross-section	rectangular
Width	10 mm
Height	7 mm
LED gluing width A	7 mm
Max power of a single KLUŚ LED strip	9.6 W/m
Possibility of twisting	yes
Possibility of bending	yes
Radius of the light arc	yes
Inward	150 mm
Outward	150 mm
Building type	Retail, Entertainment/ Arts, HoReCa object
Facility zone	furniture, bathroom, kitchen, office, advertising / POS, shop windows and exhibition

Color	Length	Ref
■ silver anodized	1000 mm	A08288A_1 B8288ANODA_1
	2005 mm	A08288A_2 B8288ANODA_2
	3010 mm	A08288A_3 B8288ANODA_3
■ black anodized	1000 mm	A08288A07_1 B8288K7_1
	2005 mm	A08288A07_2 B8288K7_2
	3010 mm	A08288A07_3 B8288K7_3


Profile PIKO

Ref. A08288




Ref. arch B8288

Easy assembly and disassembly by snapping in and out	yes
The cover is cut to the length of the profile	yes
Wire out end cap	yes
Wire out back of extrusion	yes

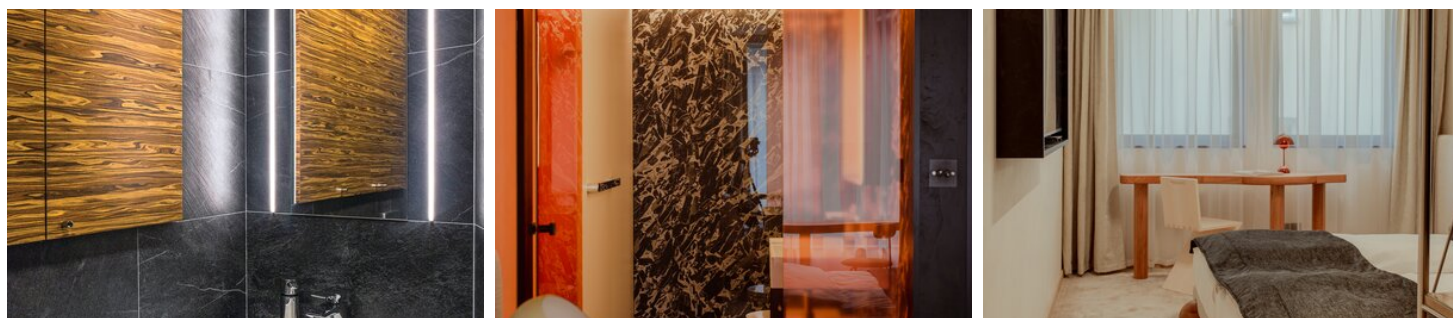





SAMPLE PROJECTS




RELATED ACCESSORIES > COVERS

NAME		MATERIAL	MATERIAL TRANSMITTANCE	COLOR	REF.	
BENCO			silicon	58 %	frosted	B17069F 17069F
PIKO			PMMA	57 %	satin	B17034S 17034

RELATED ACCESSORIES > END CAPS

NAME		MATERIAL	COLOR	REF.
PIKO		ABS	 gray	C24202C02 24202
			 black	C24202C07 24379
PIKO-OTW		ABS	 gray	C24202C02TW 24299
			 black	C24202C07TW 24399

RELATED ACCESSORIES > RELATED LED



KWP-5KSHD-0960-24

KWP-5KSHD-0960-24


RELATED ACCESSORIES > RELATED LED > BENDABLE



K-BT-0910-24

K-BT-0910-24

RELATED ACCESSORIES > RELATED LED > RGB / RGB-W / RGB-CTT



K-1560-RGB-24V

K-RGB-1560-24

Ref. arch K-1560-RGB-24V

RELATED ACCESSORIES > RELATED LED > ULTRATHIN



K-1091-24V

K-1091-24

Ref. arch K-1091-24V

Profile PIKO

Ref. A08288

Ref. arch B8288

RELATED ACCESSORIES > RELATED LED > WHITE MONO



5K-WP-K-1091-24V
KWP-5K-1091-24
Ref. arch 5K-WP-K-1091-24V



K-SHD-0960-24
K-SHD-0960-24

RELATED ACCESSORIES > OTHER RELATED ACCESSORIES > FASTENERS AND HEADS FOR PROFILES



FASTENER
K-10-PP
C28235N00
Ref. arch 42670



FASTENER
K-10-WL
C28237N00
Ref. arch 42672



FASTENER
K-10-WP
C28236N00
Ref. arch 42671

RELATED ACCESSORIES > OTHER RELATED ACCESSORIES > MOUNTING BRACKETS



MOUNTING BRACKET
K-10
C24340C00
Ref. arch 24340

RELATED ACCESSORIES > OTHER RELATED ACCESSORIES > OTHER



GLAND
6x1,2
C24517C07
Ref. arch 00802