


Cover PIKO-7R

Ref. B17164F, B17164B, B17164T

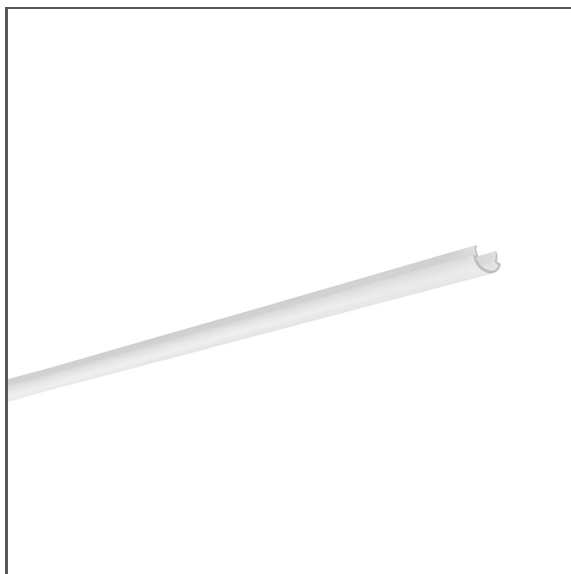

- Excellent light dispersion
- Resistance to weather conditions

APPLICATION

- LED protection and light diffusion in lighting fixtures


MOUNTING

- Snapped in a dedicated profile

ADDITIONAL INFORMATION

- standard lengths of KLUŚ profiles and covers: 1000 mm (tolerance ± 1.5 mm) and 2005 mm / 3010 mm (tolerance + 5 mm); for selected covers: 6050 mm, 10050 mm (tolerance + 5 mm)
- when choosing a different length of profiles / covers than available in the standard, you should additionally choose the cutting service at KLUŚ

TECHNICAL DRAWING



TECHNICAL SPECIFICATIONS

Material	PMMA
Shape	round
Maximum length on request	6000 mm
Width	9 mm
Possibility of obtaining a line of light	yes
Possibility of bending	yes
UV resistance	yes

Finish	Light transmission	Length	Ref
satin	52 %	1000 mm	B17164S_1
		2005 mm	B17164S_2
		3010 mm	B17164S_3
black	24 %	1000 mm	B17164B_1
		2005 mm	B17164B_2
		3010 mm	B17164B_3
semi-transparent	93 %	1000 mm	B17164T_1
		2005 mm	B17164T_2
		3010 mm	B17164T_3

Cover PIKO-7R

Ref. B17164F, B17164B, B17164T

RELATED PROFILES > MINIMALISTIC



PIKO-O
A01167