

- Linear gallery, stage or exhibition lighting
- The lighting fixture integrates with the mounting surface
- Hidden light source
- Lighting angle: 50 Degrees
- Mounting to 12,5 mm - 0.49" drywall
- Stable mounting to a suspended ceiling

APPLICATION

- decorative lighting and functional

MOUNTING


- in drywall, with screws
- can be easily connected into runs and systems

ADDITIONAL INFORMATION

- in order to protect the lighting fixture during installation, a TECH-KA protective insert should be used
- standard lengths of KLUŚ profiles and covers: 1000 mm (tolerance ± 1.5 mm) and 2005 mm / 3010 mm (tolerance + 5 mm); for selected covers: 6050 mm, 10050 mm (tolerance + 5 mm)
- when choosing a different length of profiles / covers than available in the standard, you should additionally choose the cutting service at KLUŚ

TECHNICAL DRAWING

1:2

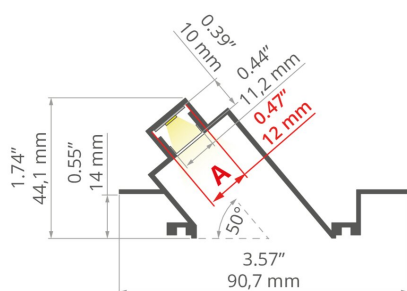

TECHNICAL SPECIFICATIONS

Material	aluminum
Possible fixture IP	20
Possible fixture shapes	linear, polygonal
Width	92 mm
Height	44.2 mm
Number of LED strips A (8 mm wide)	1
Width of the glow	11.2 mm
Max power of a single KLUŚ LED strip	24 W/m
Lighting at an angle	50
Possibility of obtaining a line of light	yes
Building type	Entertainment/ Arts, Retail, HoReCa object
Facility zone	wall lighting, shop windows and exhibition, communication routes and corridors
The cover is cut to the length of the profile	yes
Can be easily connected into runs	yes
Mounting to drywall	yes
To cover with plaster	yes

Color	Length	LED gluing width A	Ref
■ silver non anodized	1000 mm	11 mm	A01179N_1
	2005 mm	12 mm	A01179N_2
	3010 mm		A01179N_3
□ white lacquered	1000 mm	12 mm	A01179L10OD_1
	2005 mm		A01179L10OD_2
	3010 mm		A01179L10OD_3




Profile POKET

Ref. A01179


Wire out back of extrusion

yes


SAMPLE PROJECTS

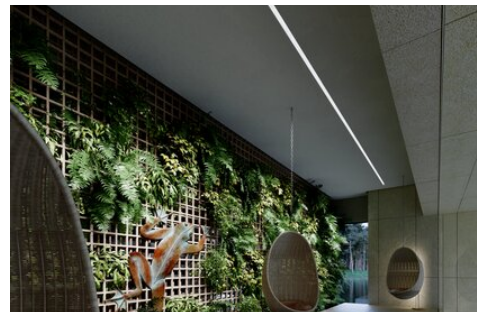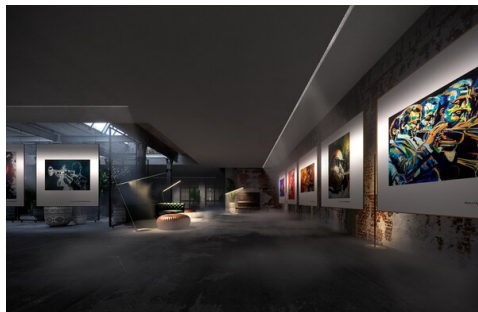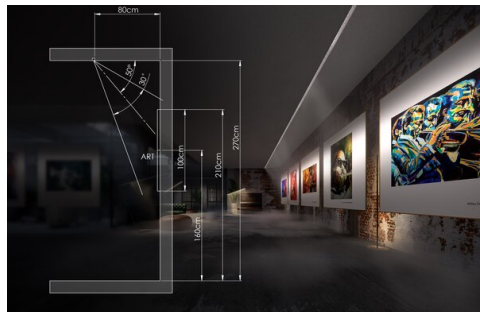


RELATED ACCESSORIES > COVERS

NAME	MATERIAL	MATERIAL TRANSMITTANCE	COLOR	REF.
HS		59 %	frosted	B17208F
		88 %	clear	B17208C


RELATED ACCESSORIES > END CAPS

NAME	MATERIAL	COLOR	REF.
POKET NEW		<input checked="" type="checkbox"/> gray	C24460C02
		<input type="checkbox"/> white	C24460C10

RELATED ACCESSORIES > RELATED LED



K-30/18-1770-010V-24V
K-30/18-1770-010V-24V



K-1200-120-RGB-24V
K-1200-120-RGB-24V

RELATED ACCESSORIES > RELATED LED > ADJUSTABLE WHITE / DIM TO WARM




K-27T50-1440-24
K-27T50-1440-24




K-18D30-0960-24
K-18D30-0960-24


RELATED ACCESSORIES > RELATED LED > HIGH EFFICACY

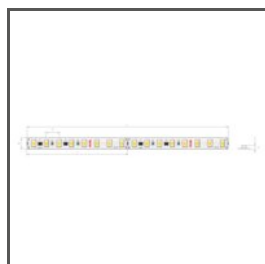


K-HE-0480-HD-24
K-HEHD-0480-24



K-HE-0960-HD-24
K-HEHD-0960-24



K-HE-1440-HD-24
K-HEHD-1440-24

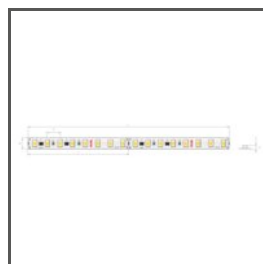

K-HE-1920-HD-24
K-HEHD-1920-24



K-VHE-0480-24
K-VHE-0480-24



K-VHE-0960-24
K-VHE-0960-24




K-VHE-1440-24
K-VHE-1440-24

RELATED ACCESSORIES > RELATED LED > RGB / RGB-W / RGB-CTT



K-RGBW-1530-24
K-RGBW-1530-24



K-1920-120-RGB-24
K-RGB-1920-120-24




K-RGB-0700-24
K-RGB-0700-24

RELATED ACCESSORIES > OTHER RELATED ACCESSORIES > CONNECTORS



CONNECTOR
ZM-NA-60
42305

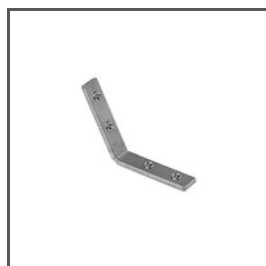

CONNECTOR
ZM-NA-PION-120
42321



CONNECTOR
ZM-NA-90
42723



CONNECTOR
ZM-NA-PION-135
42727



CONNECTOR
ZM-NA-120
C28242N00



CONNECTOR
ZM-45
C28070N00