

- For installation on the steps
- Non-slip elements
- Two lighting options
- High mechanical resistance

### APPLICATION

- warning lighting and anti-slip protection on the steps

### MOUNTING


- to a step, using properly selected screws

### ADDITIONAL INFORMATION

- standard lengths of KLUŚ profiles and covers: 1000 mm (tolerance ± 1.5 mm) and 2005 mm / 3010 mm (tolerance + 5 mm); for selected covers: 6050 mm, 10050 mm (tolerance + 5 mm)
- when choosing a different length of profiles / covers than available in the standard, you should additionally choose the cutting service at KLUŚ

### TECHNICAL DRAWING

1:2

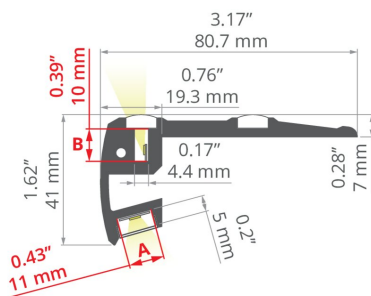

### TECHNICAL SPECIFICATIONS





Material	aluminum
Possible fixture IP	20, 67
Possible fixture shapes	linear
Width	80.7 mm
Height	40 mm
LED gluing width A	11 mm
LED gluing width B	10 mm
Number of LED strips A (8 mm wide)	1
Width of the glow	11.2 mm
Max power of a single KLUŚ LED strip	24 W/m
Building type	Commercial, Entertainment/ Arts, HoReCa object
Facility zone	stairs and handrails
The cover is cut to the length of the profile	yes
Wire out back of extrusion	yes

Color	Length	Ref
■ silver anodized	1000 mm	A18042A_1
	2005 mm	A18042A_2
	3010 mm	A18042A_3
■ black anodized	1000 mm	A18042A07_1
	2005 mm	A18042A07_2
	3010 mm	A18042A07_3

## SAMPLE PROJECTS



## RELATED ACCESSORIES > COVERS

NAME	MATERIAL	MATERIAL TRANSMITTANCE	COLOR	REF.	
Cover LIGER-11		PC	21 %	black	B17037B
			59 %	satin	B17037S
Cover HS-11		PC	59 %	frosted	B17208F
			88 %	clear	B17208C
Cover KA-11		PC	67 %	frosted	B17064F
			89 %	clear	B17064C
Cover KA-T-11		PVC	54 %	frosted	B17179F
			86 %	clear	B17179C

## RELATED ACCESSORIES > END CAPS

NAME	MATERIAL	COLOR	REF.
End cap STEP-P		■ black	C28006C07
		■ gray	C28006C02
End cap STEP-L		■ black	C28007C07
		■ gray	C28007C02
End cap STEP-90		■ black	C24025C07
		■ gray	C24025C02

RELATED ACCESSORIES > RELATED LED > ADJUSTABLE WHITE / DIM TO WARM



**K-18D30-0960-24**  
K-18D30-0960-24



**K-27T50-1440-24**  
K-27T50-1440-24

RELATED ACCESSORIES > RELATED LED > HIGH EFFICACY



**K-VHE-0480-24**  
K-VHE-0480-24



**K-VHE-0960-24**  
K-VHE-0960-24



**K-VHE-1440-24**  
K-VHE-1440-24

RELATED ACCESSORIES > RELATED LED > SIDE EMITTING




**K-SE-0480-24**  
K-SE-0480-24




**K-SE-1210-24**  
K-SE-1210-24V

RELATED ACCESSORIES > RELATED LED > WHITE MONO




**K-1910-HD-24**  
K-HD-1910-24




**KWP-1220-24**  
KWP-1220-24




**K-2300-24**  
K-2300-24




**K-0480-24**  
K-0480-24



**K-0960-24**  
K-0960-24




**K-1440-24**  
K-1440-24



**K-2400-24**  
K-2400-24



**K-HD-0480-24**  
K-HD-0480-24



**K-HD-0960-24**  
K-HD-0960-24




**K-HD-1440-24**  
K-HD-1440-24



**KWP-1440-24**  
KWP-1440-24



**KWP-0480-24**  
KWP-0480-24



**KWP-0960-24**  
KWP-0960-24



**KWP-GHD-0480-24**  
KWP-GHD-0480-24



**KWP-GHD-0960-24**  
KWP-GHD-0960-24



**KWP-GHD-1440-24**  
KWP-GHD-1440-24

## RELATED ACCESSORIES > OTHER RELATED ACCESSORIES > ADDITIONAL ITEMS



TOOL  
C28063

RELATED ACCESSORIES > OTHER RELATED ACCESSORIES > OTHER



HERMETIC COUPLER  
**THB.391.A4A, 4 pin**  
C42268C10



HERMETIC COUPLER  
**THB.381, 2pin**  
C28125C07



HERMETIC COUPLER  
**THB.391.A5A, 5 pin**  
C28156C07



JOINT CONNECTOR  
**THB.200.E5E, 5 pin**  
C28157C07

RELATED ACCESSORIES > OTHER RELATED ACCESSORIES > SILICONE CORDS



ANTI-SLIP RUBBER STRIP  
**14**  
C24537C00

RELATED ACCESSORIES > ELECTRONICS > SWITCHES



**UNI-11**  
E61603



**UNI-P**  
E61580