


PV2 R40


ΠΕΡΙΕΧΟΜΕΝΑ / CONTENTS

| | |
|-----------|---|
| datasheet | 1 |
| manual | 3 |

SKU: **PV2R40-** XX-XX-XX-XX-XX-XX-XX-XX-XX-XX-XX-XX

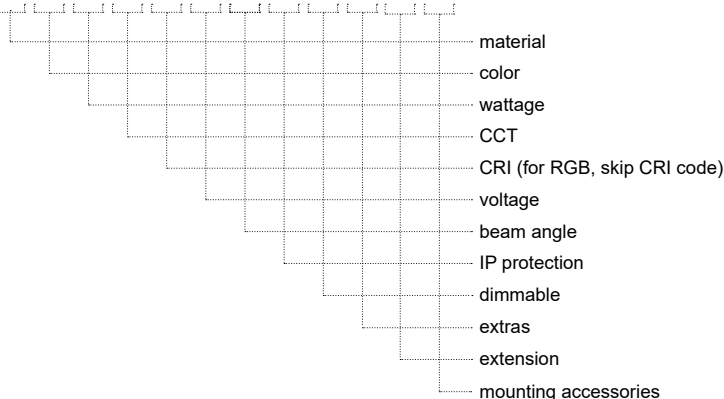

PV2 R40 (PV2R40-) / Datasheet

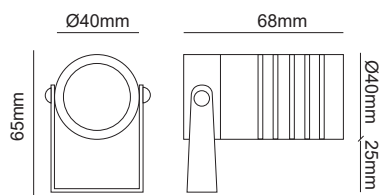

general information

| | |
|--------------------------|-----------------------------------|
| Application | Outdoor / Surface mounted |
| Direction of mounting | Ceiling / Wall / Ground |
| Incl. cable | Yes |
| Electric gear | Not included |
| LED type | XTE/XRE/XPE/NICHIA/GU10 |
| Life time | 50000 hrs |
| Warranty | 3-5 years (*5 years upon request) |
| Origin | Greece |
| Visible dimensions (Ø×L) | Ø40 × 68 mm |

PV2 R40 / Datasheet

| Material | Color | Wattage | CCT | CRI | Voltage | Beam angle | IP | Dimmable |
|----------------|-----------------|------------|-----------------|-----------|-------------|--------------|-----------|----------|
| Aluminium (01) | Anodised (AN) | 0.5W (05W) | 2700K (27K) | Ra80 (80) | 12VDC (V1) | Diffuse (DF) | IP65 (65) | Yes (D) |
| | | 1W (1W) | 3000K (30K) | Ra90 (90) | 24VDC (V2) | 8° (8D) | IP66 (66) | No (L) |
| Inox (02) | Black (BL) | 2W (2W) | 4000K (40K) | | 230VAC (V3) | 15° (15D) | IP67 (67) | |
| | | 2.5W (25W) | 5000K (50K) | | 12/24V (V4) | 20° (20D) | | |
| Brass (03) | White (WH) | 3W (3W) | 6000K (60K) | | 350mA (V5) | 35° (35D) | | |
| | | | | | 500mA (V6) | 40° (40D) | | |
| PVC (04) | RAL colors (RL) | | (R)/(G)/(B)/(A) | | | 60° (60D) | | |
| | | | RGB (C1) | | | 80° (80D) | | |

| Extras | Extension | Mounting accessories |
|----------------|--------------------------------|--------------------------------------|
| Shadow (SH) | Branch of height 130mm (H13) | Bracket Π (B2) |
| Honeycomb (HC) | Branch of height 300mm (H30) | Base R40x25mm (MB1) |
| none (L) | Branch of height 400mm (H40) | Base R55x27mm (MB2) |
| | Branch of height 500mm (H50) | Pole Φ10x200mm Brass (PL1) |
| | Branch of height 600mm (H60) | Pole Φ10x600mm Brass (PL2) |
| | Branch of height 700mm (H70) | Pole Φ10x1000mm Brass (PL3) |
| | Branch of height 800mm (H80) | Spike D32x150mm Aluminium (SP) |
| | Branch of height 900mm (H90) | Pole Φ10x200mm Brass with base (PL4) |
| | Branch of height 1000mm (H100) | Strap-mount for tree branch (TU) |
| | none (L) | none (L) |

Δημιουργία Κωδικού προϊόντος / Product Code generator

PV2R40- material - color - wattage - CCT - CRI - voltage - beam angle - IP - dimmable - extras - extension - mounting accessories


EXAMPLE:

PV2R40 - 01-BL-3W-27K-90-V1-15D-65-D-SH-HC -H30-MB1


for PV2 R40, aluminium, black, 3W, 2700K, Ra90, 12VDC, 15°, IP65, dimmable, shadow and honeycomb - branch of height 300mm, base R40x27

PV2 R40 / Manual


1.

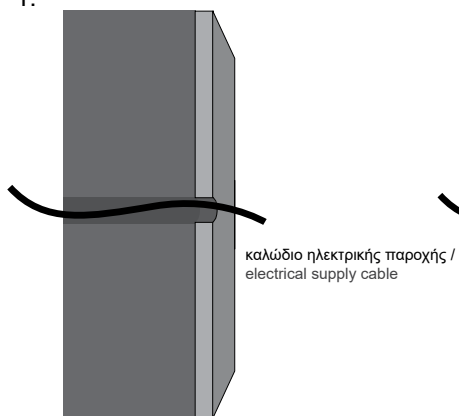

2.

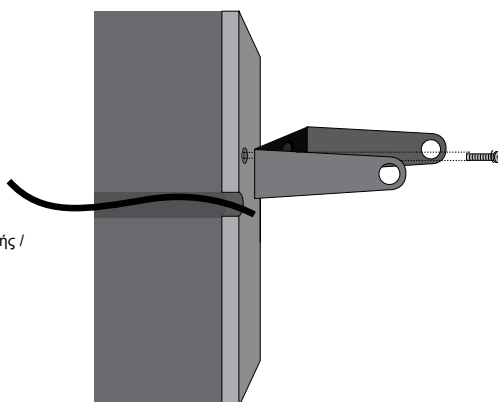


3.

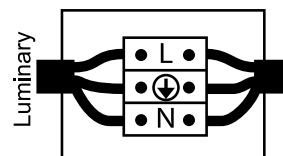


Συνδέστε το καλώδιο του φωτιστικού με την ηλεκτρική παροχή. / Connect the cable of the luminaire with the electrical supply.

4. Εφαρμογή στον τοίχο / Application on the wall

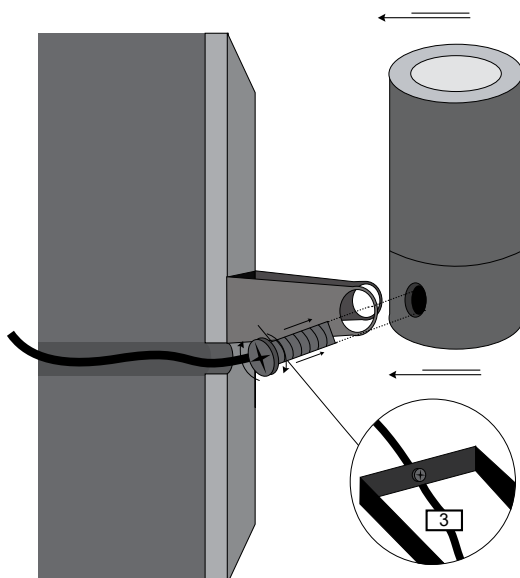


Εφαρμόστε το φωτιστικό στην τοποθετημένη βάση και βιδώστε το πάνω της μέχρι να σταθεροποιηθεί. / Apply the lamp to the mounted base and tighten it until it is firmly stabilized on the base.

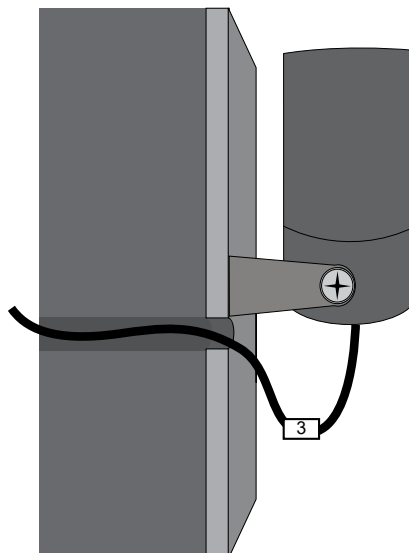


PV2 R40 / Manual

ΕΝΑΛΛΑΚΤΙΚΟΙ ΤΡΟΠΟΙ ΤΟΠΟΘΕΤΗΣΗΣ // ALTERNATIVE APPLICATION WAYS

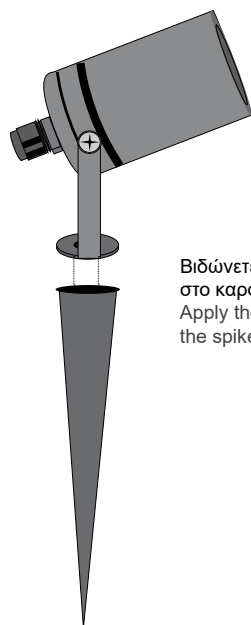


Βιδώνετε την βάση με το φωτιστικό στο καρφί τοποθέτησης. / Apply the base with the luminaire on the spike with screws.

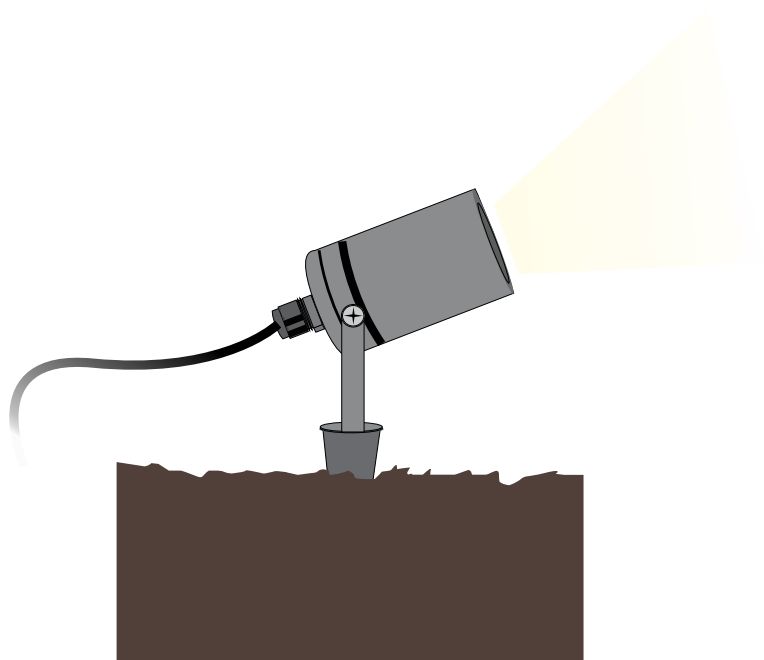


Τα φωτιστικά spots για εξωτερική χρήση μπορούν επίσης να εφαρμοστούν στο έδαφος με το αξεσουάρ spike (καρφί) / Spots for outdoor use can also be applied on the ground with the spike accessory

PV2 R40 / manual

Εφαρμογή στο έδαφος /
Application on the ground

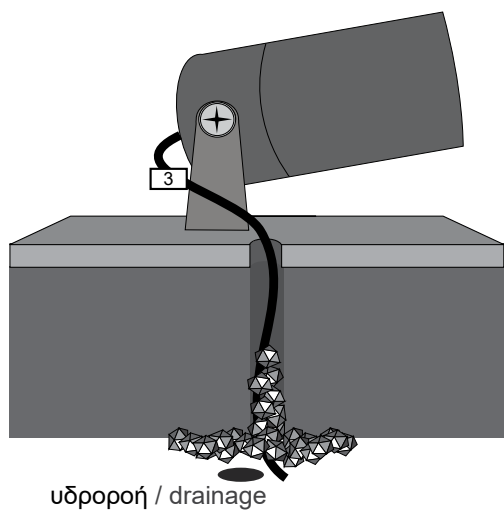

Εφαρμογή στο ταβάνι /
Application on the ceiling

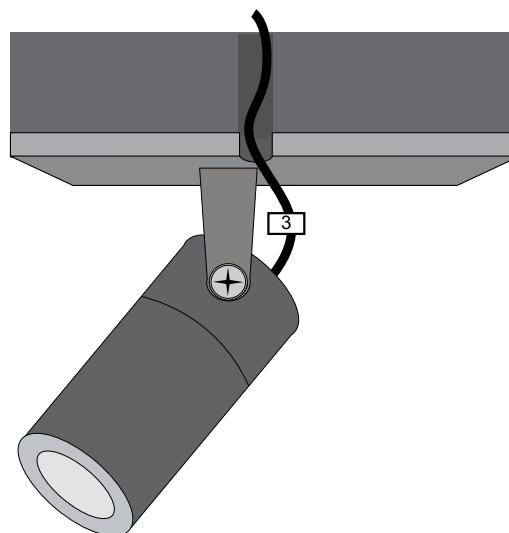

Nail Φ10 Brass

SKU:

H20cm: **24010205-010**

H60cm: **24010205-014**

H90cm: **24010205-020**

