


# RHINE 37×60 WALL FLAT





## ΠΕΡΙΕΧΟΜΕΝΑ / CONTENTS

DATASHEET ..... 1  
 MANUAL ..... 3

SKU: RHNWL - XX-XX-XX-XX-XX-XX-XX-XX



## DATASHEET

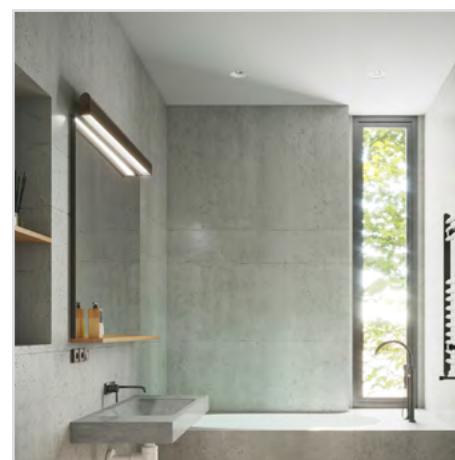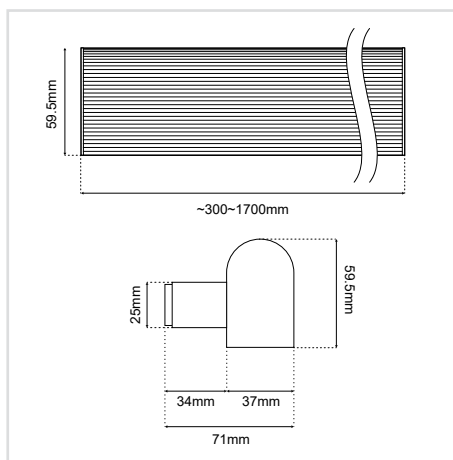













## GENERAL INFORMATION











APPLICATION	Indoor / Surface mounted
DIRECTION OF MOUNTING	Wall
MATERIAL	Extruded aluminium
PCB DETAILS	Zhaga-Compliant Dimensions
PROFILE DIMENSIONS (W×H)	37 × 60mm
LUMINAIRE DIMENSIONS (W×H)	71 × 60mm
IP RATING	IP20
CRI	Ra>80 (Ra>90 on request)
VOLTAGE	230VAC
DIMMING OPTIONS	Push / DALI / TRIAC 0/1-10V / CASAMBI / Analog 0/1-10V
LUMEN OUTPUT / W	Up to 195 Lm/W
LIFE TIME	72000 hours
WARRANTY	5 years
ORIGIN	Greece

# RHINE 37×60 WALL FLAT DATASHEET

SKU: RHNWL - XX-XX-XX-XX-XX-XX-XX-XX-XX

OUTPUT CATEGORY  
LENGTH  
CCT  
COLOR  
END CAPS  
END CAPS COLOR  
IP PROTECTION  
DIMMABLE  
EXTRAS

Output category*	Length*	CCT*		Color		
1A: 13.5 W/m (1A)	57cm (57cm)	3000K (30K)		Anodised (AN)		
1B: 20 W/m (1B)	85cm (85cm)	4000K (40K)		Black (BL)		
	113cm (113cm)	5000K (50K)		White (WH)		
	141cm (141cm)	6500K (65K)		Graphite (GF)		
	169cm (169cm)	TUNABLE 2700K - 6500K (-TN-)		RAL colors (RL)		
	197cm (197cm)				Patina (PT)	
					Nickel plating (NK)	

End caps*		End caps color		IP*	Dimmable*	Extras	
Plastic (CP)		Anodised (AN)		IP20 (20)	Dim (D)	Pull-cord switch (SWP)	
Metal (CM)		Black (BL)		IP54 (54)	No dim ( _ )		
		White (WH)					
		Graphite (GF)		Please get the corresponding <b>Controllers / Dimmers</b> from our wide range of products.			
		RAL colors (RL)					
		Patina (PT)					
		Nickel plating (NK)					

\* Υποχρεωτική επιλογή / Mandatory option

Δημιουργία Κωδικού προϊόντος / Product Code generator

**RHNWL - output category - length - CCT - color - end caps - end caps color - IP - dimmable - extras**

EXAMPLE:

RHNWL - 1A-57-30K-BL-CP-BL-20-D-SWP

for RHINE 37×60 WALL FLAT, category 1A, 57cm length, 3000K, black, plastic black end caps, IP20, dimmable, with pull-cord switch

## RHINE 37×60 WALL FLAT MANUAL

### ΟΔΗΓΙΕΣ ΕΓΚΑΤΑΣΤΑΣΗΣ INSTALLATION INSTRUCTIONS

#### ΣΗΜΑΝΤΙΚΟ:

Αυτό το εξάρτημα πρέπει να εγκατασταθεί από εξειδικευμένο ηλεκτρολόγο.

Η BarisLight δεν φέρει ευθύνη για τυχόν ζητήματα που προκύπτουν από ακατάλληλη εγκατάσταση που δεν συμμορφώνεται με τα τοπικά πρότυπα ασφαλείας.

Παρακαλούμε δώστε ένα αντίγραφο αυτών των οδηγιών στο άτομο που είναι υπεύθυνο για τη συντήρηση της εγκατάστασης.

#### IMPORTANT:

This luminaire must be installed by a qualified electrician.


#### Disclaimer:

BarisLight is not liable for any issues arising from improper installation that does not comply with local safety standards.

#### Instructions:

Please provide a copy of these instructions to the person responsible for maintaining the installation.

### Εφαρμογή στην επιφάνεια Application on the surface

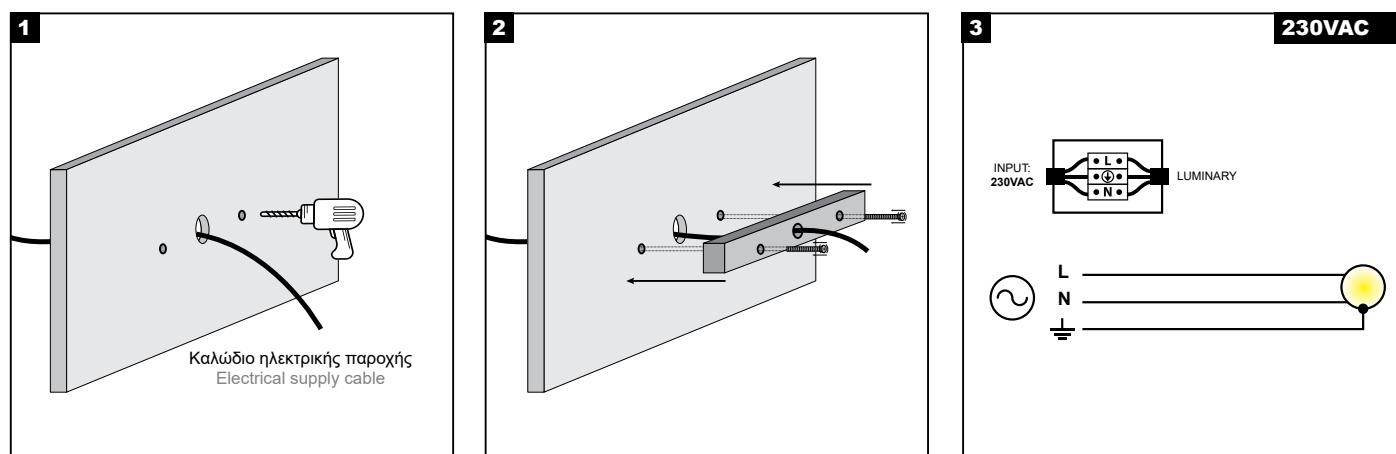

#### Διαδικασία καλωδίωσης

1. Κλείστε τον κεντρικό διακόπτη ρεύματος.
2. Συνδέστε τα φωτιστικά στη μονάδα παροχής ρεύματος.
3. Συνδέστε τη μονάδα τροφοδοσίας στο ηλεκτρικό δίκτυο.
4. Ενεργοποιήστε τον κεντρικό διακόπτη ρεύματος.

**Σημείωση ασφαλείας:** Βεβαιωθείτε ότι ο κεντρικός διακόπτης λειτουργίας είναι απενεργοποιημένος κατά τη διάρκεια όλων των διαδικασιών συντήρησης και εγκατάστασης.

**Προειδοποίηση:** Αποφύγετε τη σύνδεση πάρα πολλών φωτιστικών παράλληλα σε μία μόνο μονάδα τροφοδοσίας για να αποφευχθεί η υπερφόρτωση.

#### Wiring Procedure

1. Turn off the main power switch.
2. Connect the luminaires to the power supply unit.
3. Connect the power supply unit to the electrical network.
4. Turn on the main power switch.

**Safety Notice:** Ensure the main power switch is turned off during all maintenance and installation procedures.

**Warning:** Avoid connecting too many luminaires in parallel to a single power supply unit to prevent overloading.

## RHINE 37×60 WALL FLAT MANUAL

