

WALL 12 O'CLOCK PIKO

ΠΕΡΙΕΧΟΜΕΝΑ / CONTENTS

Datasheet	1
Manual	3

SKU: 12CLCP- XX-XX-XX-XX-XX-XX-XX-XX


Height	
Rosette	
Rosette installation	
Light direction	
Color	
CCT	
Voltage	
IP	
Dimmable	

DATASHEET

GENERAL INFORMATION

APPLICATION:	Indoor
MOUNTING SURFACE:	Wall
MOUNTING TYPE:	Surface
MATERIAL:	Aluminium
LIFE TIME:	50000 hours
WARRANTY:	3-5 years (*5 years upon request)
ORIGIN:	Greece

CONFIGURATION OPTIONS



*HEIGHT:

(85cm)
(120cm)
(150cm)
(180cm)

*ROSETTE:

Base R40×27mm
(Only for 24VDC (V2))

(MB1H)



Base R75×57mm

(MB3)



*ROSETTE INSTALLATION:

One rosette (up to 150cm height)		Two rosettes (required from 150cm)	
Base	(R1)	Base × 2	(R1+1)
1/4 Profile	(R2)	1/8 Profile × 2	(R2+2)
Middle	(R3)	1/4 Profile × 2	(R+4)
Other (upon request)	(RKZ)	3/8 Profile × 2	(R+3)
		Other (upon request)	(2RBKZ)

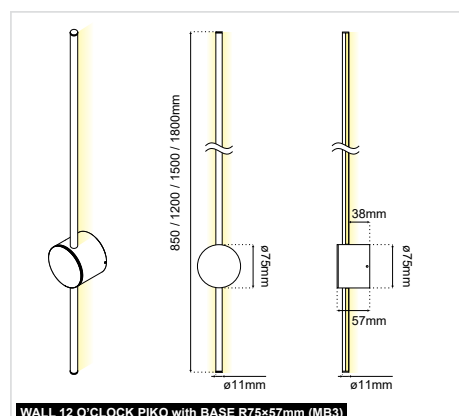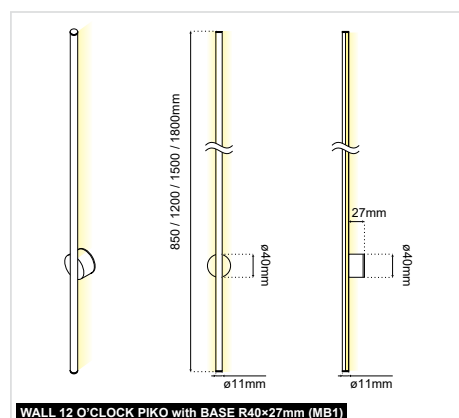


Continued on next page →

WALL 12 O'CLOCK PIKO DATASHEET

SKU: 12CLCP - XX-XX-XX-XX-XX-XX-XX-XX-XX

HEIGHT
ROSETTE
ROSETTE PLACEMENT
LIGHT DIRECTION
COLOR
CCT
VOLTAGE
IP
DIMMABLE

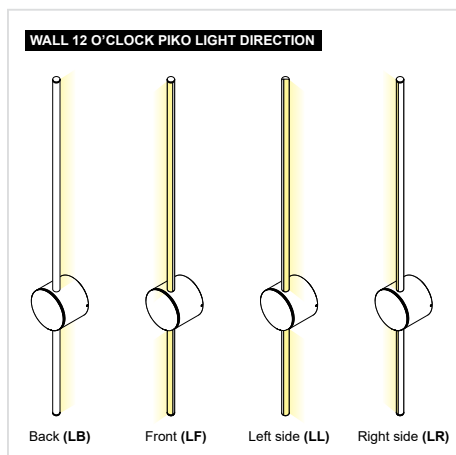

CONFIGURATION OPTIONS (cont.)


*LIGHT DIRECTION:

Back	(LB)	
Front	(LF)	
Left side	(LL)	
Right side	(LR)	

*COLOR:

Anodised	(AN)	
Black	(BL)	
White	(WH)	
Graphite	(GF)	
RAL colors	(RL)	
Patina	(PT)	
Nickel plating (upon request)	(NK)	
No color	(NO)	

*CCT:

2700K	(27K)		6 W/m	Ra90	486 lm/m
3000K	(30K)				540 lm/m
4000K	(40K)				600 lm/m
6000K	(60K)				630 lm/m
2700K-6000K Tunable	(TN)		10 W/m	Ra96	969 lm/m

WATTAGE:

CRI:

OUTPUT:

*VOLTAGE:

24VDC	(V2)
230VAC	(V3)

*IP:

IP20	(20)
IP44	(44)

*DIMMABLE:

Dim	(D)
Dim 230VAC	(DV3)
No dim	(_)

Please get the corresponding **Controllers / Dimmers** from our wide range of products.

* Υποχρεωτική επιλογή / Mandatory option

ΔΗΜΙΟΥΡΓΙΑ ΚΩΔΙΚΟΥ ΠΡΟΪΟΝΤΟΣ / PRODUCT CODE GENERATOR:

12CLCP - height - rosette - rosette placement - light direction - color - CCT - CRI - voltage - IP - dimmable

ΠΑΡΑΔΕΙΓΜΑ / EXAMPLE:

12CLCP-085-MB3-R3-LB-BL-30K-80-V3-20-D

for WALL12 O'CLOCK PIKO, 850mm, Base R75×57mm, Middle Rosette, Light back, Black, 3000K, Ra80, 230VAC, IP20, dimmable

WALL 12 O'CLOCK PIKO MANUAL

ΟΔΗΓΙΕΣ ΕΓΚΑΤΑΣΤΑΣΗΣ INSTALLATION INSTRUCTIONS

ΣΗΜΑΝΤΙΚΟ:

Αυτό το εξάρτημα πρέπει να εγκατασταθεί από εξειδικευμένο ηλεκτρολόγο.

Η BarisLight δεν φέρει ευθύνη για τυχόν ζητήματα που προκύπτουν από ακατάλληλη εγκατάσταση που δεν συμμορφώνεται με τα τοπικά πρότυπα ασφαλείας.

Παρακαλούμε δώστε ένα αντίγραφο αυτών των οδηγιών στο άτομο που είναι υπεύθυνο για τη συντήρηση της εγκατάστασης.

IMPORTANT:

This luminaire must be installed by a qualified electrician.


Disclaimer:

BarisLight is not liable for any issues arising from improper installation that does not comply with local safety standards.

Instructions:

Please provide a copy of these instructions to the person responsible for maintaining the installation.

Εφαρμογή στην επιφάνεια Application on the surface

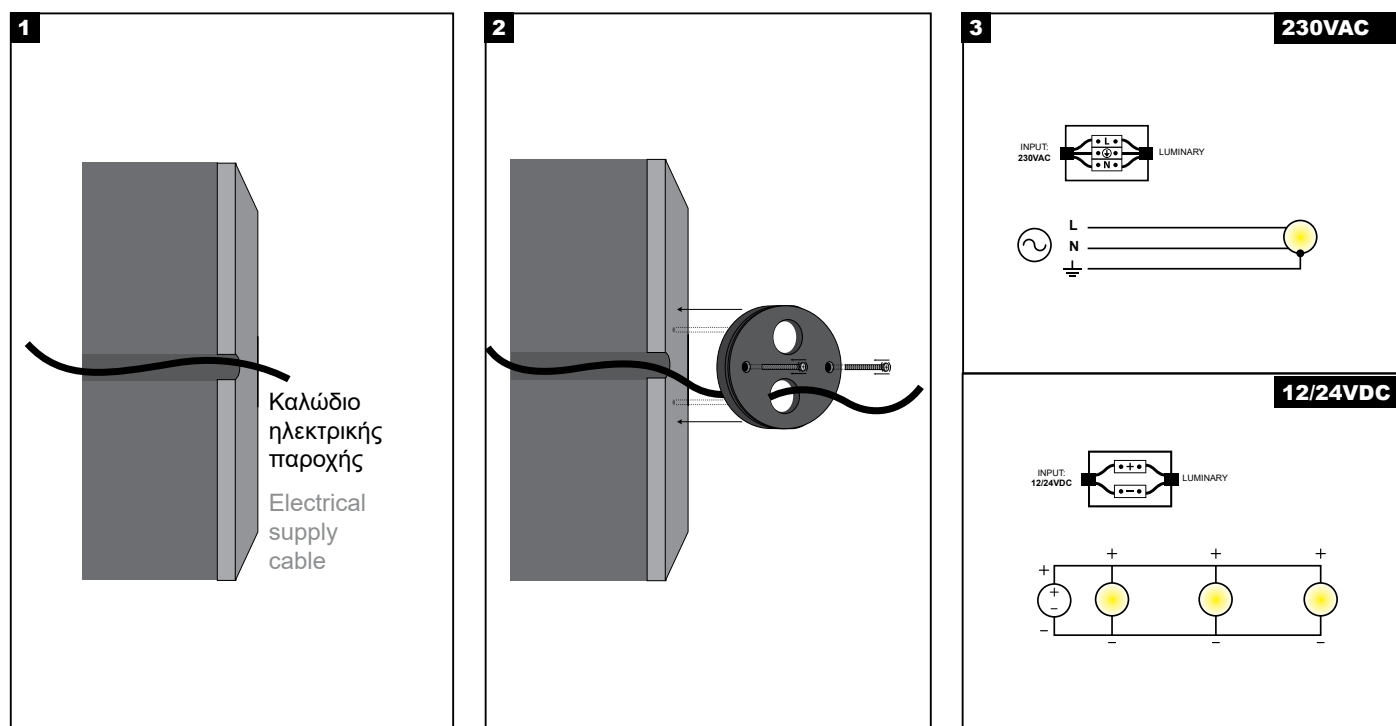

Διαδικασία καλωδίωσης

1. Κλείστε τον κεντρικό διακόπτη ρεύματος.
2. Συνδέστε τα φωτιστικά στη μονάδα παροχής ρεύματος.
3. Συνδέστε τη μονάδα τροφοδοσίας στο ηλεκτρικό δίκτυο.
4. Ενεργοποιήστε τον κεντρικό διακόπτη ρεύματος.

Σημείωση ασφαλείας: Βεβαιωθείτε ότι ο κεντρικός διακόπτης λειτουργίας είναι απενεργοποιημένος κατά τη διάρκεια όλων των διαδικασιών συντήρησης και εγκατάστασης.

Προειδοποίηση: Αποφύγετε τη σύνδεση πάρα πολλών φωτιστικών παράλληλα σε μία μόνο μονάδα τροφοδοσίας για να αποφευχθεί η υπερφόρτωση.

Wiring Procedure

1. Turn off the main power switch.
2. Connect the luminaires to the power supply unit.
3. Connect the power supply unit to the electrical network.
4. Turn on the main power switch.

Safety Notice: Ensure the main power switch is turned off during all maintenance and installation procedures.

Warning: Avoid connecting too many luminaires in parallel to a single power supply unit to prevent overloading.

WALL 12 O'CLOCK PIKO MANUAL

